

ORDER NO.ACED001012C1

C4

Service Manual

AUTOMOTIVE CONSUMER ELECTRONICS

CQ-5500U

Heavy Duty CD Player / Weather Band Receiver with Changer Control



SPECIFICATIONS

Specifications *

General

Power Supply	: 12V DC (11V-16V) Test Voltage 14.4V, Negative ground
Maximum Power Output	: 37 Wx4 channel at 400Hz, Volume Control maximum
Power Output	: 18 W per channel into 4 ohms, 40 to 30,000Hz, at 3% THD
Tone Action	: Bass; ± 10 dB at 100Hz Treble; ± 10 dB at 10kHz
Current Consumption	: Less than 2.5 A (0.5W 4-Speaker)
Speaker Impedance	: 4 Ω (4-8 Ω acceptable)

AM Radio

Frequency Range	: 530 - 1,710kHz
Useable Sensitivity	: 28 dB/ μ V (25 μ V/ S/N 20dB)

FM Stereo Radio

Frequency Range	: 87.9 - 107.9MHz
Useable Sensitivity	: 12 dBf. (1.1 μ V/75 Ω , S/N 30 dB)
50 dB Quieting Sensitivity	: 17 dBf. (2.0 μ V/75 Ω)
Frequency Response	: 30 - 15,000Hz $\pm$ 3dB
Alternate Channel Sensitivity	: 75 dB
Stereo Separation	: 35 dB at 1,000Hz
Signal/Noise Ratio	: 70 dB (Mono)

WB Radio

Frequency Range	: 162.40 - 162.55MHz
Useable Sensitivity	: 3 dB (S/N 20dB)
Signal/Noise Ratio	: 50 dB (40 dB/ μ V)

CD Player

Sampling Frequency	: 32 times oversampling
DA Converter	: MASH.1 bit/4 DAC System
Error Correction System	: Panasonic Super Decoding Algorithm
Pick-Up type	: 1-beam
Light Source	: Semiconductor laser
Wavelength	: 780nm
Frequency Response	: 20Hz-20,000Hz (± 1 dB)
Signal to Noise Ratio	: 98 dB
Total Harmonic Distortion	: 0.01% (1 kHz)
Wow and Flutter	: Below measurable limits
Channel Separation	: 75 dB

Dimensions **	: 7" x 1-15/16" x 5-7/8" (178 x 50 X 150mm)
Weight **	: 3 lbs. 8 oz (1.6kg)

* Specifications and the design are subject to possible modification without notice due to improvements.

** Dimensions and weight shown are approximate.

*** Above specifications comply with EIA standards.



1. FEATURES

- 24-Stations Preset (6-FM1, 6-FM2, 6-W/B, 6-AM).
- Electronic Control of Volume, Bass, Treble, Balance and Fader.
- 32 times oversampling MASH 1bit/4 DAC system.
- Digital servo for reliable playback.
- S.HDB (Super High Definition Bass) function.
- Clock function.
- Power amplifier output : 37W x 4
- Temperature Readout

2. REPLACING THE FUSE

Be sure to use a fuse of the specified rating (10A) when replacing a blown fuse. Fuses with higher capacity ratings, use of any substitute, or connection without a fuse may result in a fire hazard or damage to the unit.

3. MAINTENANCE

Your product is designed and manufactured to ensure a minimum of maintenance. Use a soft cloth for routine exterior cleaning. Never use benzine, thinner or other solvent.


4. RADIO AND CD DECK ALIGNMENT

- RADIO BLOCK / Do not align the AM/FM and WB (Weather Band) package blocks. When the package block is necessary, it will be supplied already aligned at the factory.
- CD DECK BLOCK / This model has no servo alignment points because microcomputer controls the servo circuit.

5. DIMENSIONS



6. WIRING CONNECTION

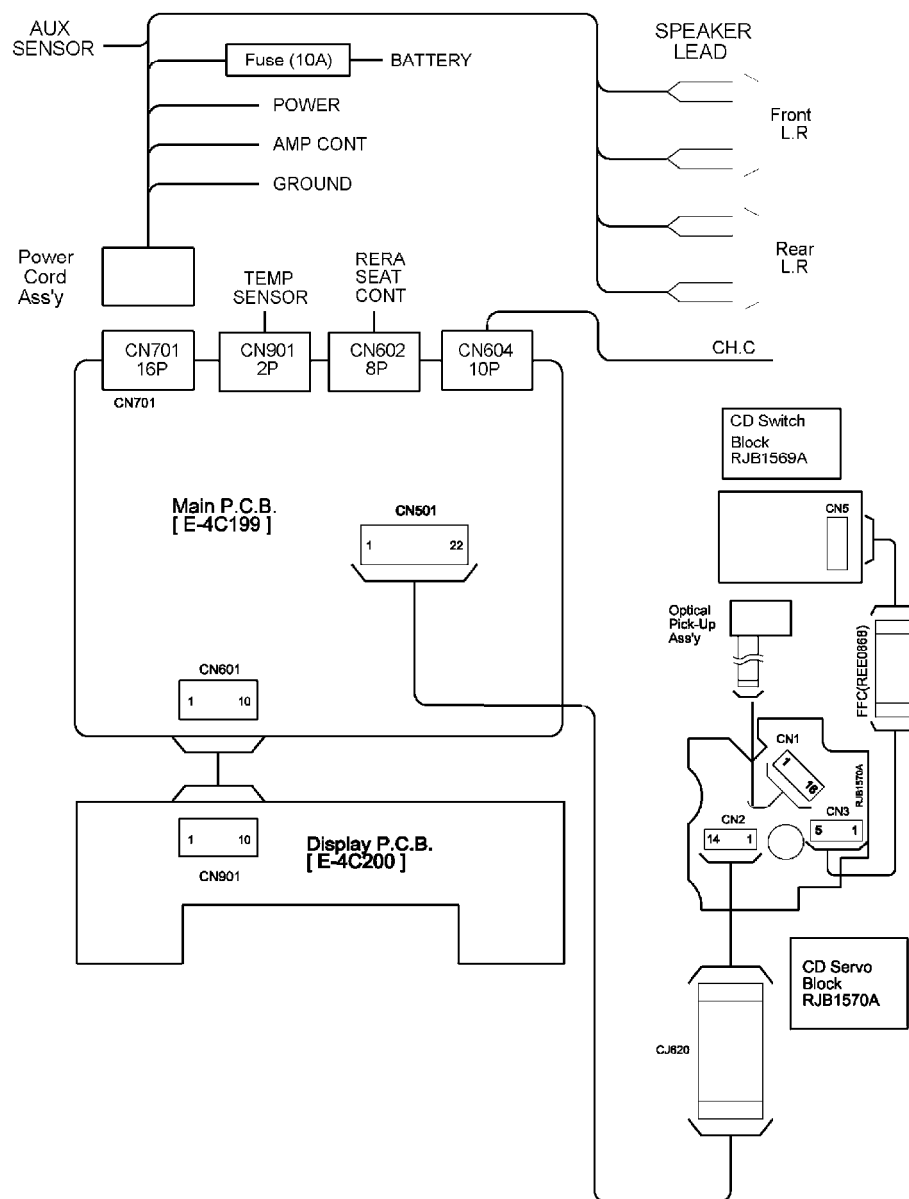


9. WIRING DIAGRAM (Display Block)




10. PACKAGE AND IC BLOCK DIAGRAM


P50 YEAU4CMXU01

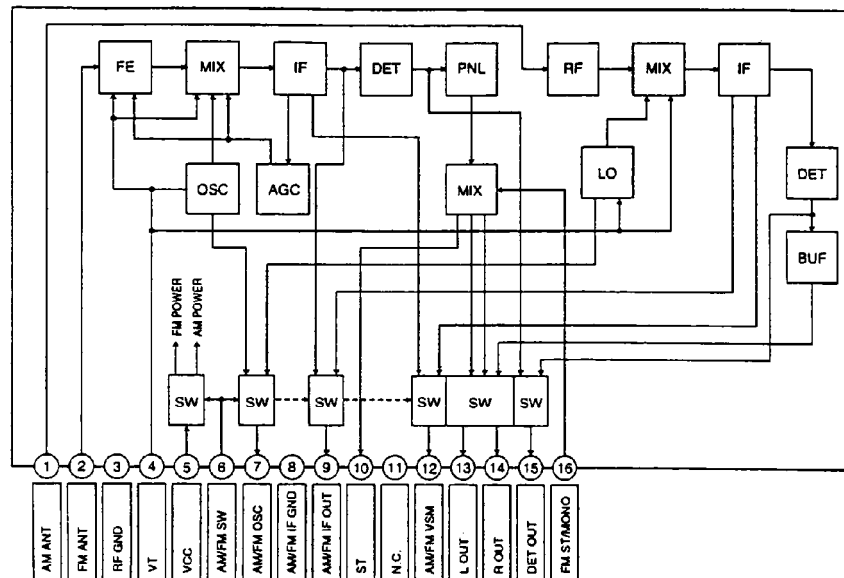


P10 YEAU034CSU02

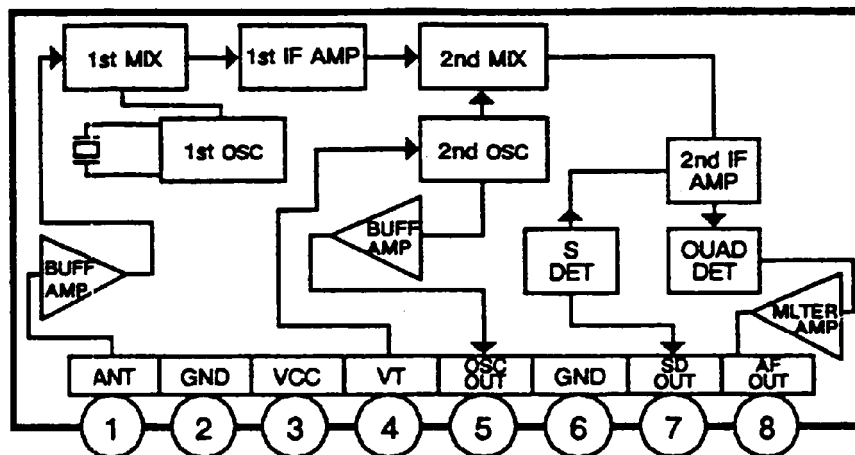


IC203 AN6552S-E1

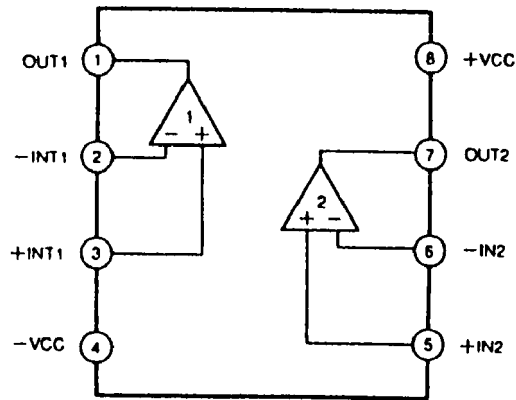


IC204 YEAMBU4066F2

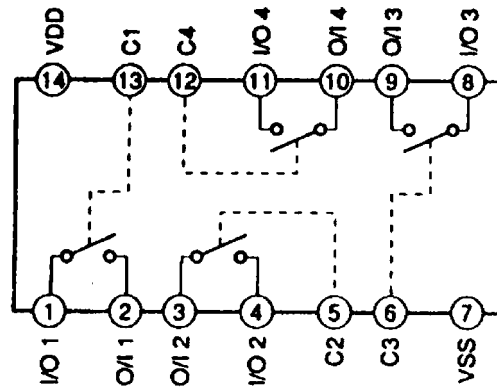


IC205 YEAMEA6320TT

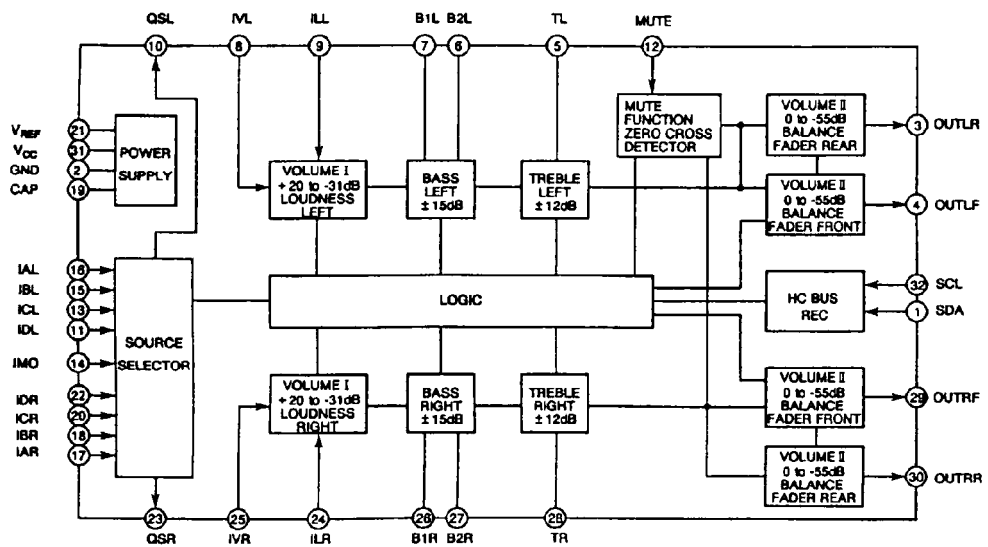


IC701 AN78N05

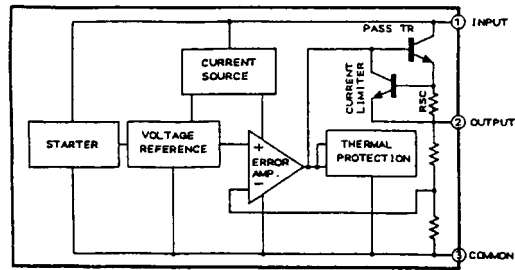


IC602 YEAMTC4584FN

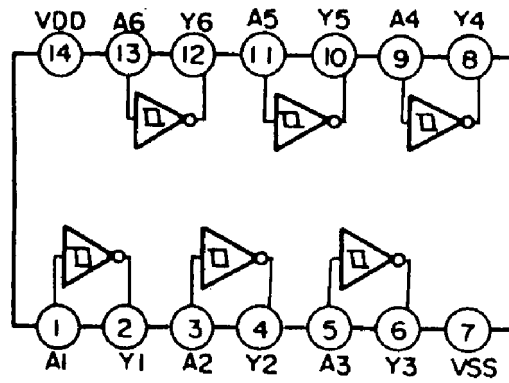


IC902 YEAMSBX8035F

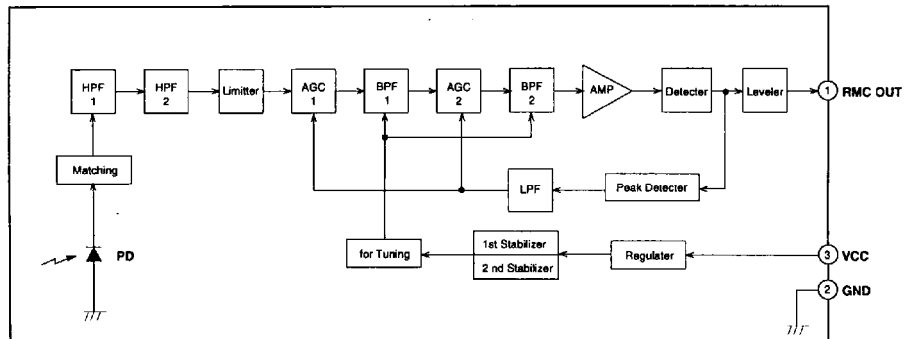

IC800 YEAMM51957AL

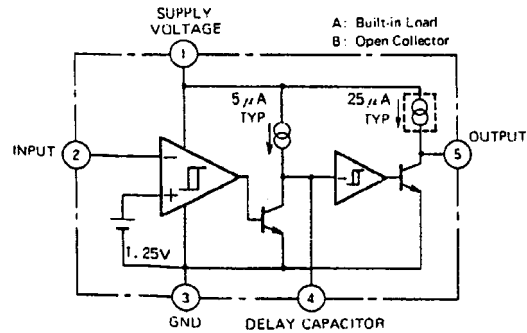

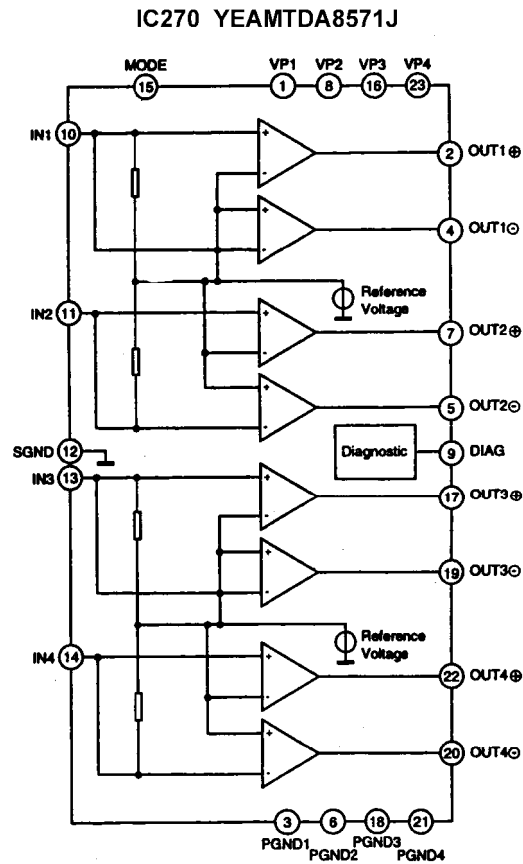

11. SCHEMATIC DIAGRAM (Main Block)

12. WIRING DIAGRAM (Main Block)

13. TERMINALS DESCRIPTION

13.1. Main Block

IC601 YEAM17708614

Pin No.	Name	Description	I/O	Vol. (V)		
				AM	FM	TAPE
1	BATT	Battery Detection	I	5.3	2.5	5.3
2	(NC)	(Connect to Ground)	-	-	-	-
3	MODE2	Tape Detection input	I	4.7	4.7	4.7
4	(NC)	(Connect to Ground)	-	-	-	-
5	MS	No sound Detection (TPS)	I	0	0	0
6	R-REEL	Reel Pulse Detection(R)	I	1.5	2.3	3
7	F-REEL	Reel Pulse Detection(F)	I	1.4	2	3.1
8	(NC)	-	-	-	-	-
9	ST	Stereo Signal Input	I	4.6	4.6	4.6
10	MTL	Deck Metal Output H:ON L:OFF	O	0	0	0
11	DOLBY ON/OFF	Dolby NR ON/OFF H:OFF L:ON	O	0	0	0
12	(NC)	-	-	-	-	-
13	MS GAIN	Music Search Gain Control	O	0	0	0
14	ACC	ACC Detection	I	5.2	5.2	5.2
15	MMT-F	Main Motor Control	I/O	4.8	4.8	4.8
16	CD MUTE	Main Motor Control	I/O	0	0	0
17	FM/AM BW	FM/AM Select Switch	O	8.1	0	0.1
18	RADIO ON	AM/FM Tuner ON	O	0	0	0.1
19	WB	W/B Tuner ON	O	7.1	7.1	7.1
20	SSC	FM/AM SSC Control	O	0	0	0
21	GND	Ground	-	0	0	0
22	(NC)	-	-	-	-	-
23	(NC)	-	-	-	-	-
24	INIT B	(Pull-down)	-	0	0	0
25	INIT A	(Connect to Ground)	-	0	0	0
26	SD FM	FM SD Input	I	0.2	0.7	0.7
27	SD AM	AM SD Input	I	2.4	2.4	2.7
28	AMIFC	AM IF Input	I	0	0	0
29	FMIFC	FM IF Input	I	1.2	1.6	2.5
30	VDD	Power supply +5V	-	4.8	4.8	4.8

Pin No.	Name	Description	I/O	Vol. (V)		
				AM	FM	TAPE
31	FM/AM OSC	FM OSC Input	I	2.6	2.6	2.6
32	WB OSC	WB OSC Input	I	0	0	0
33	GND	Ground	-	0	0	0
34	E01	FM / AM VT Output	O	1.5	1.5	1.5
35	E02 (NC)	-	-	-	-	-
36	(NC)	(Connect to Ground)	-	-	-	-
37	MONO (NC)	-	-	-	-	-
38	LOC (NC)	-	-	-	-	-
39	BEEP1	Beep Sound Output 1	O	0	0	0
40	BEEP2	Beep Sound Output 2	O	0	0	0
41	CD CLK2	CD Clock 2	I	4.7	4.7	4.7
42	CDC STB	CD Changer Strobe	I	2.3	2.3	2.3
43	TIN/T EXIST	Tape-in Switch Signal input	I	0	0	0
44	(NC)	-	-	-	-	-
45	(NC)	-	-	-	-	-
46	F/R	Forward/Reverse Select Signal	O	0	4.7	0
47	PW CNT	System Power Control	O	4.7	4.7	4.7
48	SYS CNT	AMP ST-BY Control	O	4.8	4.8	4.8
49	MUTE	Mute Control L: mute ON	O	4.8	4.8	4.8
50	PL ON (NC)	-	-	-	-	-
51	HDB ON	S HDB ON Signal Output	O	4.8	4.8	4.8
52	(NC)	-	-	-	-	-
53	CDC SELECT (NC)	-	-	-	-	-
54	(NC)	-	-	-	-	-
55	LCD D01 (NC)	-	-	-	-	-
56	LCD CLK	LCD Clock	O	0	0	0
57	LCD DI (MO)	LCD Data input	O	0	0	0
58	LCD CE	LCD Chip Enable	O	0.3	0.3	0

Pin No.	Name	Description	I/O	Vol. (V)		
				AM	FM	TAPE
59	LCD DO(MI)	LCD Data Output	I	5.3	5.3	5.3
60	(NC)	-	-	-	-	-
61	(NC)	-	-	-	-	-
62	REMOUT	Remoto Data Output	O	4.8	4.8	4.8
63	12C DATA	12C Data	I	0	5	4.9
64	12C CLK	12C Clock	O	5	5	5
65	CDC CLK	CD Changer Clock	I	2	2.3	2.3
66	MOTOR ANT (NC)	-	-	-	-	-
67	CDC DATA	CD Changer Data	I	2	2.3	2.3
68	MOD3	Tape Deck Mode3	O	4.8	4.8	4.8
69	MODE2 (NC)	-	-	-	-	-
70	MODE1	Tape Deck Mode1	I	4.8	4.8	4.8
71	SMT-R	Sub Motor Control (R)	I	4.8	4.8	4.8
72	SMT-F	Sub Motor Control (F)	O	0	4.8	0
73	TELMUTE	Telephone Mute Control	I	4.7	4.7	4.7
74	VTER (NC)	-	-	-	-	-
75	GND	Ground	-	0	0	0
76	X OUT	Crystal Oscillator	O	2.3	2.3	2.3
77	X IN	Crystal Oscillator	I	1.8	1.8	2
78	CE	Chip Enable	I	4.8	4.8	4.8
79	VDD	Power supply +5V	-	4.8	4.8	4.8
80	RESET	Reset input	I	4.8	4.8	4.8

13.2. Display Block

IC901 YEAMLC75853

Pin No.	Name	Description	I/O	Volt(V)
1	(NC)	-	-	-
2	P.LED	LED Indicator Signal Output	O	0
3~40	S3~S40	LCD Segment	O	2.7
41	COM1	LCD Common	O	2.7
42	COM2	LCD Common	O	2.7
43	COM3	LCD Common	O	2.7
44~49	KS1~KS6	Key Data Output	O	5.3
50~54	K11~K15	Key Data Input	I	0
55	TEST	(Connect to Ground)	-	0
56	VDD	+5V Power Supply	-	5.3
57	VDD1	+5V Power Supply	-	3.5
58	VDD2	+5V Power Supply	-	1.8
59	VSS	(Connect to Ground)	-	0
60	OSC	CR Oscillator	-	3.9
61	DO	LCD Data Output	O	5.2
62	CE	Chip Enable	I	0.3
63	CLK	LCD Clock Input	I	0
64	DI	LCD Data Input	I	0

14. SCHEMATIC DIAGRAM (CD Servo Block)

15. WIRING DIAGRAM (CD Servo Block)

16. REPLACEMENT PARTS LIST (Unit)

Note:

1. Be sure to make your orders of replacement parts according to this list.
2. Important safety notice: Component, identified by  mark have special characteristics important for safety. when replacing any of these components, use only manufacturer's specified parts.
3. Location keys in the remarks column indicates the general location of the parts shown in the exploded drawing, as in a load map.
4. The marking (RTL) indicates that Retention Time is limited for this item. After the discontinuation of assembly in production, the item will continue to be availability is dependent on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.
5. "T" marks in remarks column are indicated supply parts of TAMACO.

Ref. No.	Part No.	Part Name & Description	Remarks
1.1 IC's and Transistors			
MAIN BLOCK [E-4C199]			
IC203	AN6552S-E1	IC	
IC204	YEAMBU4066F2	IC	T
IC205	YEAMEA6320TT	IC	
IC270	YEAMTDA8571J	IC	
IC601	YEAM17708615	IC	T
IC602	YEAMTC4584FN	IC	T
IC701	AN78N05	IC	
IC715	AN78N05	IC	
IC800	YEAMM51957AL	IC	
P10	YEAU034CSU03	WB Tuner Pack	T
P50	CT-U02A	FM/AM Tuner Pack	T
Q10	YEAN2SC3330T	Transistor	T
Q241	YEANDTC323ST	Transistor	T
Q341	YEANDTC323ST	Transistor	T
Q401	YEAN2SK583T	Transistor	T
Q630	YEANDTA144ST	Transistor	T
Q702	YEAND1762EF	Transistor	T
Q703	YEANC114YST	Transistor	T
Q705	YEANB123YST	Transistor	T
Q706	YEANA123YST	Transistor	T
Q707	YEANB123YST	Transistor	T
Q708	YEAN2SD2007T	Transistor	T
Q710	YEANB1243QRT	Transistor	T
Q711	YEANC114YST	Transistor	T
Q712	YEANB123YST	Transistor	T
Q713	YEANC114YST	Transistor	T
Q800	YEAND1762EF	Transistor	T
DISPLAY BLOCK [E-4C200]			
IC902	YEAMSBX8035F	IC	T
IC901	YEAMLC75853E	IC	T
Q911	YEANA114EKTXT	Transistor	T
1.2. Diodes			
MAIN BLOCK [E-4C199]			
D4	YEADMTZ91BT	Diode	T
D5	YEADRD51JS3T	Zener Diode	T
D10	YEAD1N4005T	Silicon Diode	T
D25	MA856TA	Diode	
D26	YEAD1N4148C	Diode	T
D27	YEAD1N4148C	Diode	T
D50	YEAD1N4148C	Diode	T
D51	MA856TA	Diode	
D60	YEADRD56JS3T	Zener Diode	T
D61	YEADRD56JS3T	Zener Diode	T
D62	YEADRD56JS3T	Zener Diode	T
D63	YEADRD56JS3T	Zener Diode	T
D201	YEAD1N4148C	Diode	T
D255	YEAD1N4005T	Silicon Diode	T

Ref. No.	Part No.	Part Name & Description	Remarks
D256	YEAD1N4005T	Silicon Diode	T
D257	YEAD1N4005T	Silicon Diode	T
D258	YEAD1N4005T	Silicon Diode	T
D355	YEAD1N4005T	Silicon Diode	T
D356	YEAD1N4005T	Silicon Diode	T
D357	YEAD1N4005T	Silicon Diode	T
D358	YEAD1N4005T	Silicon Diode	T
D401	YEADMTZ10CT	Diode	T
D701	YEADSR10A08G	Silicon Diode	T
D702	YEAD1N4005T	Silicon Diode	T
D704	YEADMTZ91BT	Zener Diode	T
D708	MA700TA	Diode	
D709	MA700TA	Diode	
D710	YEAD1N4148C	Diode	T
D712	YEADRD51JS3T	Zener Diode	T
D714	YEADMTZ91BT	Zener Diode	T
D715	YEAD1N4005T	Silicon Diode	T
D802	YEAD1N4005T	Silicon Diode	T
D900	YEADMTZ91BT	Zener Diode	T
D901	MA700TA	Diode	
D902	MA700TA	Diode	
Z50	ERZG07DK470T	Zener Diode	T
Z51	YEADSPD201M	Surge Protector	T
DISPLAY BLOCK [E-4C200]			
D500	SML210MT	LED (GREEN)	T
D501	SML210MT	LED (GREEN)	T
D920	SLR342VRT31	LED (RED)	T
D921	SLR342MGT31	LED (GREEN)	T
D922	SLR342MGT31	LED (GREEN)	T
D923	SLR342MGT31	LED (GREEN)	T
D924	SLR342MGT31	LED (GREEN)	T
D925	SLR342MGT31	LED (GREEN)	T
D926	SLR342MGT31	LED (GREEN)	T
D927	SLR342MGT31	LED (GREEN)	T
D928	SLR342MGT31	LED (GREEN)	T
D929	SLR342MGT31	LED (GREEN)	T
D930	SML210MT	LED (GREEN)	T
D931	SML210MT	LED (GREEN)	T
D932	SLR342MGT31	LED (GREEN)	T
D933	SLR342MGT31	LED (GREEN)	T
D935	SLR342MGT31	LED (GREEN)	T
D936	SLR342MGT31	LED (GREEN)	T
D937	SLR342MGT31	LED (GREEN)	T
D938	SLR342MGT31	LED (GREEN)	T
1.3 Capacitors			
MAIN BLOCK [E-4C199]			
C4	ECEA1AKS220I	Electrolytic 22MFD 10WV	
C10	ECUV1H103KBN	Ceramic 0.01MFD 50WV	T
C11	ECUV1C474KBN	Ceramic 0.47MFD 50WV	T

Ref. No.	Part No.	Part Name & Description	Remarks
C12	ECUV1H103KBN	Ceramic 0.01MFD 50WV	T
C17	ECUV1H103KBN	Ceramic 0.01MFD 50WV	T
C21	ECEA1HKS010I	Electrolytic 1MFD 50WV	
C22	ECEA1AKS101I	Electrolytic 100MFD 10WV	
C51	ECEA1CKS470I	Electrolytic 47MFD 16WV	
C52	ECUV1H103KBN	Ceramic 0.01MFD 50WV	T
C54	ECUV1H103KBN	Ceramic 0.01MFD 50WV	T
C57	ECUV1H273KBN	Ceramic 0.027MFD 50WV	T
C58	ECUV1H273KBN	Ceramic 0.027MFD 50WV	T
C60	ECUV1H103KBM	Ceramic 0.01MFD 50WV	T
C61	ECUV1H102KBN	Ceramic 0.001MFD 50WV	T
C66	ECUV1H103KBN	Ceramic 0.01MFD 50WV	T
C207	ECUV1C224KBN	Ceramic 0.22MFD 50WV	T
C217	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
C218	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
C220	ECUV1H123KBN	Ceramic 0.012MFD 50WV	T
C221	ECEA1HKS010I	Electrolytic 1MFD 50WV	
C222	ECUV1H103KBN	Ceramic 0.01MFD 50WV	T
C223	ECEA0JKS470I	Electrolytic 47MFD 6.3WV	
C232	ECEA1CKS100I	Electrolytic 10MFD 16WV	
C233	ECUV1C224KBN	Ceramic 0.22MFD 50WV	T
C234	ECUV1C224KBN	Ceramic 0.22MFD 50WV	T
C237	ECUV1H333KBN	Ceramic 0.033MFD	T
C238	ECUV1H562KBN	Ceramic 0.0056MFD 50WV	T
C239	ECEA1HKS3R3I	Electrolytic 3.3MFD 50WV	
C240	ECEA1HKS3R3I	Electrolytic 3.3MFD 50WV	
C241	ECEA1HKS010I	Electrolytic 1MFD 50WV	
C242	ECEA1HKS010I	Electrolytic 1MFD mfd 50WV	
C249	ECUV1H222KBN	Ceramic 0.0022MFD 50WV	T
C250	ECUV1H222KBN	Ceramic 0.0022MFD 50WV	T
C251	ECUV1H181JCN	Ceramic 180pF 50WV	T
C252	ECUV1H181JCN	Ceramic 180pF 50WV	T
C253	ECEA1CKS100I	Electrolytic 10MFD 16WV	
C255	ECUV1H683KBM	Ceramic 0.068MFD 50WV	T
C256	ECUV1H683KBM	Ceramic 0.068MFD 50WV	T
C257	ECUV1H683KBM	Ceramic 0.068MFD 50WV	T
C258	ECUV1H683KBM	Ceramic 0.068MFD 50WV	T
C267	ECUV1H102KBN	Ceramic 0.001MFD 50WV	T
C268	ECUV1H221KBN	Ceramic 220pF 50WV	T
C269	ECUV1H102KBN	Ceramic 0.001MFD 50WV	T
C274	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
C307	ECUV1C224KBN	Ceramic 0.22MFD 16WV	T
C317	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
C318	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
C320	ECUV1H123KBN	Ceramic 0.012MFD 50WV	T
C321	ECEA1HKS010I	Electrolytic 1MFD 50WV	
C322	ECUV1H103KBN	Ceramic 0.01MFD 50WV	T
C323	ECEA0JKS470I	Electrolytic 47MFD 6.3WV	
C324	ECEA1AKS470I	Electrolytic 47MFD 10WV	
C325	ECEA0JKS101I	Electrolytic 100MFD 6.3WV	
C331	ECEA1HKS3R3I	Electrolytic 3.3MFD 50WV	
C332	ECEA1CKS100I	Electrolytic 10MFD 16WV	
C333	ECUV1C224KBN	Ceramic 0.22MFD 16WV	T
C334	ECUV1C224KBN	Ceramic 0.22MFD 16WV	T

Ref. No.	Part No.	Part Name & Description	Remarks
C337	ECUV1H333KBM	Ceramic 0.033MFD 50WV	T
C338	ECUV1H562KBM	Ceramic 0.0056MFD 50WV	T
C339	ECEA1HKS3R3I	Electrolytic 3.3MFD 50WV	
C340	ECEA1HKS3R3I	Electrolytic 3.3MFD 50WV	
C341	ECEA1HKS010I	Electrolytic 1MFD 50WV	
C342	ECEA1HKS010I	Electrolytic 1MFD 50WV	
C349	ECUV1H222KBN	Ceramic 0.0022MFD 50WV	T
C350	ECUV1H222KBN	Ceramic 0.0022MFD 50WV	T
C351	ECUV1H181JCN	Ceramic 180pF 50WV	T
C352	ECUV1H181JCN	Ceramic 180pF 50WV	T
C353	ECEA1CKS100I	Electrolytic 10MFD 16WV	
C355	ECUV1H683KBN	Ceramic 0.068MFD 50WV	T
C356	ECUV1H683KBM	Ceramic 0.068MFD 50WV	T
C357	ECUV1H683KBM	Ceramic 0.068MFD 50WV	T
C358	ECUV1H683KBN	Ceramic 0.068MFD 50WV	T
C401	ECEA1VSN4R7I	Electrolytic 4.7MFD 35WV	
C402	ECEA1AKS101I	Electrolytic 100MFD 10WV	
C403	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
C408	ECUV1H102KBN	Ceramic 0.001MFD 50WV	T
C411	ECUV1H154ZFN	Ceramic 0.15MFD 50WV	T
C412	ECUV1C334KBN	Ceramic 0.33MFD 16WV	T
C600	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
C601	ECUV1H220JCN	Ceramic 22pF 50WV	T
C602	ECUV1H220JCN	Ceramic 22pF 50WV	T
C608	ECUV1H103KBN	Ceramic 0.01MFD 50WV	T
C614	YEECFYH0H223	Axial 0.022MFD 5.5WV	T
C625	ECUV1H101KBN	Ceramic 100pF 50WV	T
C626	ECUV1H680JCN	Ceramic 68pF 50WV	T
C630	ECEA1CKS470I	Electrolytic 47MFD 16WV	
C631	ECEA1HKS010I	Electrolytic 1MFD 50WV	
C632	ECEA1CKS100I	Electrolytic 10MFD 16WV	
C654	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
C655	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
C656	ECUV1H104ZFM	Ceramic 0.1MFD 50WV	T
C657	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
C701	ECEA0JKS101I	Electrolytic 100MFD 6.3WV	
C702	ECEA1EKS101I	Electrolytic 100MFD 25WV	
C703	ECUV1H103KBN	Ceramic 0.01MFD 50WV	T
C705	ECEA1CKS101I	Electrolytic 100MFD 16WV	
C707	ECEA1AKS221I	Electrolytic 220MFD 10WV	
C708	ECEA1AKS221I	Electrolytic 220MFD 10WV	
C709	ECEA1CKS101I	Electrolytic 100MFD 16WV	
C715	ECEA0JKS331I	Electrolytic 330MFD 6.3WV	
C717	ECEA1CKS100I	Electrolytic 10MFD 16WV	
C718	ECEA1HKS010I	Electrolytic 1MFD 50WV	
C719	ECUV1H103KBM	Ceramic 0.01MFD 50WV	T
C720	ECEA1VU472YC	Electrolytic 4700MFD 35WV	
C721	ECEA1AKS221I	Electrolytic 220MFD 10WV	
C722	ECUV1H103KBN	Ceramic 0.01MFD 50WV	T
C733	ECUV1H222KBN	Ceramic 0.0022MFD 50WV	T
C799	ECA1CU222C	Electrolytic 2200MFD 16WV	
C900	ECUV1H104KBN	Ceramic 0.1MFD 50WV	T
C950	ECEA1HKS010I	Electrolytic 1MFD 50WV	

Ref. No.	Part No.	Part Name & Description	Remarks
DISPLAY BLOCK [E-4C200]			
C901	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
C911	ECUV1H102KBN	Ceramic 0.001MFD 50WV	T
C913	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
C914	ECUV1H104ZFN	Ceramic 0.1MFD 50WV	T
1.4 Resistors			
MAIN BLOCK [E-4C199]			
J1	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J2	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J3	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J4	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J5	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J6	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J7	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J9	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J11	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J12	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J20	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J22	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J26	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J31	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J41	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J42	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J44	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J45	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J48	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J49	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J53	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J54	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J71	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J72	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J73	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J75	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J81	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J82	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J83	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J84	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J89	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J90	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J95	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J96	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J97	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J102	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J169	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J671	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J672	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J796	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J798	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J800	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J801	ERJ8GX0R00V	Chip 0 ohms 1/8W	T

Ref. No.	Part No.	Part Name & Description	Remarks
J802	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J804	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J805	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J806	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J807	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J810	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J811	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J820	ERD25TJ224	Carbon 220k ohms 1/4W	T
J821	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J822	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J823	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J824	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J825	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
J831	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J835	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J860	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J861	ERJ8GX0R00V	Chip 0 ohms 1/8W	T
J862	ERJ6GEY0R00V	Chip 0 ohms 1/10W	T
R3	ERD25TJ471	Carbon 470 ohms 1/4W	T
R4	ERJ6GEYJ473	Chip 47K ohms 1/10W	T
R6	ERJ8GEYJ472V	Chip 4.7k ohms 1/8W	T
R7	ERDS2TJ472	Carbon 4.7k ohms 1/4W	T
R8	ERJ6GEYJ105	Chip 1000k ohms 1/10W	T
R20	ERJ6GEYJ222	Chip 2.2k ohms 1/10W	T
R21	ERJ6GEYJ224	Chip 22k ohms 1/10W	T
R22	ERJ6GEYJ222	Chip 2.2k ohms 1/10W	T
R23	ERJ6GEYJ152	Chip 1.5k ohms 1/10W	T
R25	ERJ8GEYJ332V	Chip 3.3k ohms 1/8W	T
R26	ERJ6GEYJ332	Chip 3.3k ohms 1/10W	T
R50	ERJ6GEYJ5R6	Chip 5.6k ohms 1/10W	T
R51	ERJ6GEYJ472	Chip 4.7k ohms 1/10W	T
R52	ERJ6GEYJ223	Chip 22k ohms 1/10W	T
R53	ERJ6GEYJ221	Chip 220 ohms 1/10W	T
R54	ERJ8GEYJ103V	Chip 10k ohms 1/8W	T
R55	ERJ6GEYJ152	Chip 1.5k ohms 1/10W	T
R56	ERJ8GEYJ103V	Chip 10k ohms 1/8W	T
R58	ERDS2TJ332	Chip 3.3k ohms 1/4W	T
R59	ERJ6GEYJ822	Chip 8.2k ohms 1/10W	T
R211	ERJ6GEYJ123	Chip 12k ohms 1/10W	T
R212	ERJ6GEYJ473	Chip 47k ohms 1/10W	T
R213	ERJ6GEYJ183	Chip 18k ohms 1/10W	T
R214	ERJ6GEYJ752	Chip 7.5k ohms 1/10W	T
R215	ERJ6GEYJ272	Chip 2.7k ohms 1/10W	T
R216	ERJ8GEYJ682V	Chip 6.8k ohms 1/10W	T
R217	ERJ6GEYJ103	Chip 10k ohms 1/10W	T
R218	ERJ6GEYJ103	Chip 10k ohms 1/10W	T
R222	ERJ8GEYJ822V	Chip 8.2k ohms 1/10W	T
R224	ERJ6GEYJ682	Chip 6.8k ohms 1/10W	T
R225	ERJ6GEYJ822	Chip 8.2k ohms 1/10W	T
R226	ERJ6GEYJ332	Chip 3.3k ohms 1/10W	T
R241	ERJ8GEYJ103V	Chip 10k ohms 1/8W	T
R243	ERJ8GEYJ471V	Chip 470 ohms 1/8W	T
R251	ERD25TJ183	Carbon 18K ohms 1/4W	T
R252	ERJ6GEYJ153	Chip 10k ohms 1/10W	T

Ref. No.	Part No.	Part Name & Description	Remarks
R263	ERJ8GEYJ101V	Chip 100 ohms 1/8W	T
R271	ERD25TJ101	Carbon 100 ohms 1/4W	T
R272	ERD25TJ101	Carbon 100 ohms 1/4W	T
R281	ERJ6GEYJ223	Chip 22k ohms 1/10W	T
R282	ERJ6GEYJ223	Chip 22k ohms 1/10W	T
R311	ERJ6GEYJ123	Chip 12k ohms 1/10W	T
R312	ERJ6GEYJ473	Chip 47k ohms 1/10W	T
R313	ERJ6GEYJ183	Chip 18k ohms 1/10W	T
R314	ERJ6GEYJ752	Chip 7.5k ohms 1/10W	T
R315	ERJ6GEYJ272	Chip 2.7k ohms 1/10W	T
R316	ERJ6GEYJ682	Chip 6.8k ohms 1/10W	T
R317	ERJ6GEYJ103	Chip 10k ohms 1/10W	T
R318	ERJ6GEYJ103	Chip 10k ohms 1/10W	T
R322	ERJ6GEYJ822	Chip 8.2k ohms 1/10W	T
R324	ERJ8GEYJ682V	Chip 6.8k ohms 1/8W	T
R325	ERJ8GEYJ822V	Chip 8.2k ohms 1/8W	T
R326	ERJ6GEYJ332	Chip 3.3k ohms 1/10W	T
R338	ERJ6GEYJ102	Chip 1k ohms 1/10W	T
R339	ERJ6GEYJ102	Chip 1k ohms 1/10W	T
R341	ERJ6GEYJ103	Chip 10k ohms 1/10W	T
R343	ERJ8GEYJ471V	Chip 470 ohms 1/8W	T
R351	ERD25TJ183	Carbon 18K ohms 1/4W	T
R352	ERJ6GEYJ153	Chip 15k ohms 1/10W	T
R363	ERJ8GEYJ101V	Chip 100 ohms 1/8W	T
R371	ERD25TJ101	Carbon 100 ohms 1/4W	T
R372	ERD25TJ101	Carbon 100 ohms 1/4W	T
R381	ERJ8GEYJ223V	Chip 22k ohms 1/8W	T
R382	ERJ6GEYJ223	Chip 22k ohms 1/10W	T
R401	ERJ8GEYJ472V	Chip 4.7k ohms 1/8W	T
R404	ERDS2TJ152	Carbon 1.5k ohms 1/4W	T
R405	ERJ6GEYJ152	Chip 1.5k ohms 1/10W	T
R406	ERDS2TJ152	Carbon 1.5k? ohms 1/4W	T
R407	ERJ6GEYJ471	Chip 470 ohms 1/10W	T
R408	ERD25TJ181	Carbon 180 ohms 1/4W	T
R411	ERJ8GEYJ123V	Chip 12k ohms 1/8W	T
R412	ERDS2TJ123	Carbon 1.2k ohms 1/4W	T
R413	ERJ6GEYJ123	Chip 12k ohms 1/10W	T
R414	ERJ6GEYJ123	Chip 12k ohms 1/10W	T
R600	ERJ6GEYJ473	Chip 47K ohms 1/10W	T
R601	ERJ6GEYJ473	Chip 47K ohms 1/10W	T
R603	ERJ6GEYJ473	Chip 47K ohms 1/10W	T
R604	ERJ6GEYJ473	Chip 47K ohms 1/10W	T
R612	ERJ6GEYJ473	Chip 47K ohms 1/10W	T
R613	ERJ8GEYJ1022V	Chip 10.2k ohms 1/8W	T
R614	ERJ6GEYJ473	Chip 47K ohms 1/10W	T
R615	ERD25TJ473	Carbon 47k ohms 1/4W	T
R616	ERDS2TJ473	Carbon 47k ohms 1/4W	T
R621	ERJ6GEYJ103	Chip 10k ohms 1/10W	T
R623	ERJ6GEYJ183	Chip 18k ohms 1/10W	T
R628	ERJ8GEYJ473V	Chip 47k ohms 1/8W	T
R629	ERJ6GEYJ683	Chip 68K ohms 1/10W	T
R630	ERD25TJ102	Carbon 1K ohms 1/4W	T
R636	ERJ6GEYJ103	Chip 10k ohms 1/10W	T
R637	ERJ8GEYJ103V	Chip 10k ohms 1/8W	T

Ref. No.	Part No.	Part Name & Description	Remarks
R638	ERJ6GEYJ472	Chip 4.7k ohms 1/10W	T
R654	ERJ6GEYJ473	Chip 47K ohms 1/10W	T
R655	ERJ6GEYJ473	Chip 47K ohms 1/10W	T
R656	ERJ6GEYJ473	Chip 47K ohms 1/10W	T
R668	ERJ6GEYJ102	Chip 1k ohms 1/10W	T
R669	ERJ6GEYJ102	Chip 1k ohms 1/10W	T
R670	ERJ6GEYJ102	Chip 1k ohms 1/10W	T
R700	ERJ6GEYJ102	Chip 1k ohms 1/10W	T
R705	ERJ8GEYJ221V	Chip 220 ohms 1/8W	T
R721	ERD25FJ5R6	Carbon 5.6 ohms 1/4W	T
R722	ERD25FJ471	Carbon 470 ohms 1/4W	T
R723	ERD25FJ5R6	Carbon 5.6? ohms 1/4W	T
R725	ERJ8GEYJ753V	Chip 75k ohms 1/8W	T
R727	ERJ8GEYJ473V	Chip 47k ohms 1/8W	T
R728	ERD25TJ681	Carbon 680 ohms 1/4W	T
R729	ERD25TJ681	Carbon 680 ohms 1/4W	T
R736	ERJ6GEYJ105	Chip 1000K ohms 1/10W	T
R737	ERJ8GEYJ472V	Chip 4.7k ohms 1/8W	T
R740	ERD25TJ472	Carbon 4.7K ohms 1/4W	T
R900	ERJ8GEYJ5R6V	Chip 5.6 ohms 1/8W	T
R901	ERJ8GEYJ471V	Chip 470 ohms 1/8W	T
R902	ERD25TJ102	Carbon 1K ohms 1/4W	T
R910	ERJ6GEYJ102	Chip 1k ohms 1/10W	T
R911	ERJ8GEYJ222V	Chip 2.2k ohms 1/8W	T
R912	ERJ6GEYJ153	Chip 15k ohms 1/10W	T
DISPLAY BLOCK [E-4C200]			
R500	ERJ6GEYJ391	Chip 390 ohms 1/10W	T
R905	ERJ6GEYJ103	Chip 10K ohms 1/10W	T
R907	ERJ8GEYJ331V	Chip 330 ohms 1/8W	T
R915	ERJ6GEYJ473	Chip 47K ohms 1/10W	T
R917	ERJ6GEYJ4R7	Chip 4.7 ohms 1/10W	T
R921	ERJ6GEYJ391	Chip 390 ohms 1/10W	T
R922	ERJ6GEYJ181	Chip 180 ohms 1/10W	T
R923	ERJ6GEYJ181	Chip 180 ohms 1/10W	T
R924	ERJ6GEYJ181	Chip 180 ohms 1/10W	T
R925	ERJ8GEYJ181V	Chip 180 ohms 1/8W	T
R926	ERJ6GEYJ391	Chip 390 ohms 1/10W	T
R927	ERJ6GEYJ391	Chip 390 ohms 1/10W	T
R929	ERJ6GEYJ390	Chip 39 ohms 1/10W	T
1.5. Connectors			
MAIN BLOCK [E-4C199]			
CN202	YEA4CRCA037	Connector (RCA)	T
CN203	YEA4CRCA037	Connector (RCA)	T
CN501	YEA5280714	Connector	
CN601	YEAETKCF010	Connector	T
CN602	YAAEA2001-8P	Connector	T
CN603	YAAEA2001-3P	Connector	T
CN604	YAAE2001-7P	Connector	T
CN701	YEA4CCON018	Connector	T


Ref. No.	Part No.	Part Name & Description	Remarks
CN901	YAAEA2001-2P	Connector	T
	YEAE4500U	Cords Ass'y	T
	YEAE1P200A	Connector	T
DISPLAY BLOCK [E-4C200]			
CN951	YEAETKCF10XS	Connector	
1.6 Electric Parts			
SWITCHES			
SW700	EVQPJJ04T		
SW902	EVQPJJ04T	Switch	
SW904	EVQPJJ04T	Switch	
SW905	EVQPJJ04T	Switch	
SW909	EVQPJJ04T	Switch	
SW910	K0H1BA000083	Switch	
SW911	EVQPJJ04T	Switch	
SW912	EVQPJJ04T	Switch	
SW913	EVQPJJ04T	Switch	
SW914	K0H1BA000083	Switch	
SW915	EVQPJJ04T	Switch	
SW916	EVQPJJ04T	Switch	
SW917	EVQPJJ04T	Switch	
SW918	EVQPJJ04T	Switch	
SW919	EVQPJJ04T	Switch	
SW920	EVQPJJ04T	Switch	
SW921	EVQPJJ04T	Switch	
CRYSTAL			
XL601	YEXL4C45TT	Crystal	T
COILS			
L30	YELTBLM21A10	Coil	T
L31	YELTBLM21A10	Coil	T
L32	YELTBLM21A10	Coil	T
L33	YELTBLM21A10	Coil	T
L35	YELTBLM21A10	Coil	T
L36	YELTBLM21A10	Coil	T
L700	YETQ024C035	Coil	T
L900	YELTBLM21B10	Coil	T
L901	YELTBLM21B10	Coil	T
L902	YELTBLM21B10	Coil	T
L903	YELTBLM21B10	Coil	T
L101	YELT02C330KT	Axial Coil	T
BPF	YEXC07T009	Band Pass Filter	T
LCD			
LCD901	YEXDCM4C077	LCD	

Ref. No.	Part No.	Part Name & Description	Remarks
POSISTOR			
PT701	YERT7AR4R7MT	Posistor	
VARIABLE RESISTORS			
VR1	EVQBAR00109B	Encode VR	
1.7 Accessories			
PRINTING			
	YFM284C332ZA	Operating Instructions	T
	YFM074C124ZA	Warranty Card	T
	YFM094C012ZA	W/B Service List	T
	YFM094C021ZA	SVC Card	T
INSTALLATION PARTS			
	YAJ024C083ZA	Power Cord Ass'y	T
	FP-164	Screw Kit and Dismounting Pin	T
	YFEG044C002	Rear Support Strap	T
	FX024C079YA	Mounting Collar	T
	YAA094C019ZA	Ant Cord	T
1.8 Mechanical Parts			
MISCELLANEOUS			
F1	XBB1F100NS5	Fuse,10A	
AE1	YEAFFC006	Flexible Circuit Board (14P)	T(2-C)
ANT1	YAA104C700ZA	Antenna Jack	T
AT1	YEAT03420	Terminal	
AT2	YEAT03420	Terminal	
AT3	YEAT03420	Terminal	
TP1	YEAT034C011	Terminal	T
TP2	YEAT034C011	Terminal	T
TP3	YEAT034C011	Terminal	T
TP4	YEAT034C011	Terminal	T
TP5	YEAT034C011	Terminal	T
1	YFA074C036ZA	Front Plate	T(3-B)
2	YFF014C044ZA	Heat Sink	T(3-B)
3	YFA094C082ZA	Right Plate	T(2-C)
4	YFA084C030YA	Rear Plate	T(3-C)
5	YFA054C029ZA	Under Cover	T(1-C)
6	YFA034C035YB	Upper Cover	T(4-C)
7	YFE134C284YA	Button (PWR/EJECT)	T(2-A)
8	FX0214C172XA	IC Bracket	T(2-B)
9	FX0054C030ZA	Spring plate	T(2-C) (3-A)
10	YFC024C478ZA	Esccheon	T(2-A)
11	YFE134C287ZA	Button (CLK/ALARM)	T(2-A)
12	YFE134C280YA	Button (MUTE/SCAN)	T(2-A)
13	YFE074C053ZA	Button (KNOB)	T(2-A)
14	FX0014C055ZA	Panel Light (PRESET)	T(2-A)

Ref. No.	Part No.	Part Name & Description	Remarks
15	XTN2+8GFZ	Screw	T(2-B)
16	YEADGL36F	Back Light Module	T(2-B)
17	FX0214C208ZA	LCD Bracket	T(2-B)
18	YFE134C286ZA	Button (BAND)	T(2-A)
19	XTB3+6FFXS	Screw	
20	YFE134C285ZA	Button (MODE)	T(2-A)
21	YEV014C002A	Bolt	T(3-C)
23	YEJT034C019	Screw (Cup Tight),3mm x 12mm	T(3-B)
24	XSS5+6FXS	Screw	T(2-C) (3-A)
26	YJT034C026ZA	Screw	T(3-C)
27	FX0014C058ZA	Panel Light (CD)	T(2-A)
28	YFS014C030ZA	Dust Sheet	T(2-B)
29	FX0214C209ZA	Fix Plate	T(2-B)
30	YEJT034C001	Screw	T(2-B) (2-C)
32	FX0214C217ZA	Deck Bracket	T(3-C)
40	YFE134C220ZA	Button (1/2)	T(2-A)
41	YFE134C221ZA	Button (3/4)	T(2-A)
42	YFE134C222ZA	Button (5/6)	T(2-A)
43	YFE134C327ZA	Button (SEEK/TUNE)	T(2-A)
44	YFJ014C049ZA	Sensor Panel	T(2-A)
45	XTN2+6C	Screw	T(3-C)
46	XTN26+8C	Screw	T(2-B)

17. EXPLODED VIEW (Unit)

■ Numbers in ○ are indicated REF.No.in the REPLACEMENT PARTS LIST

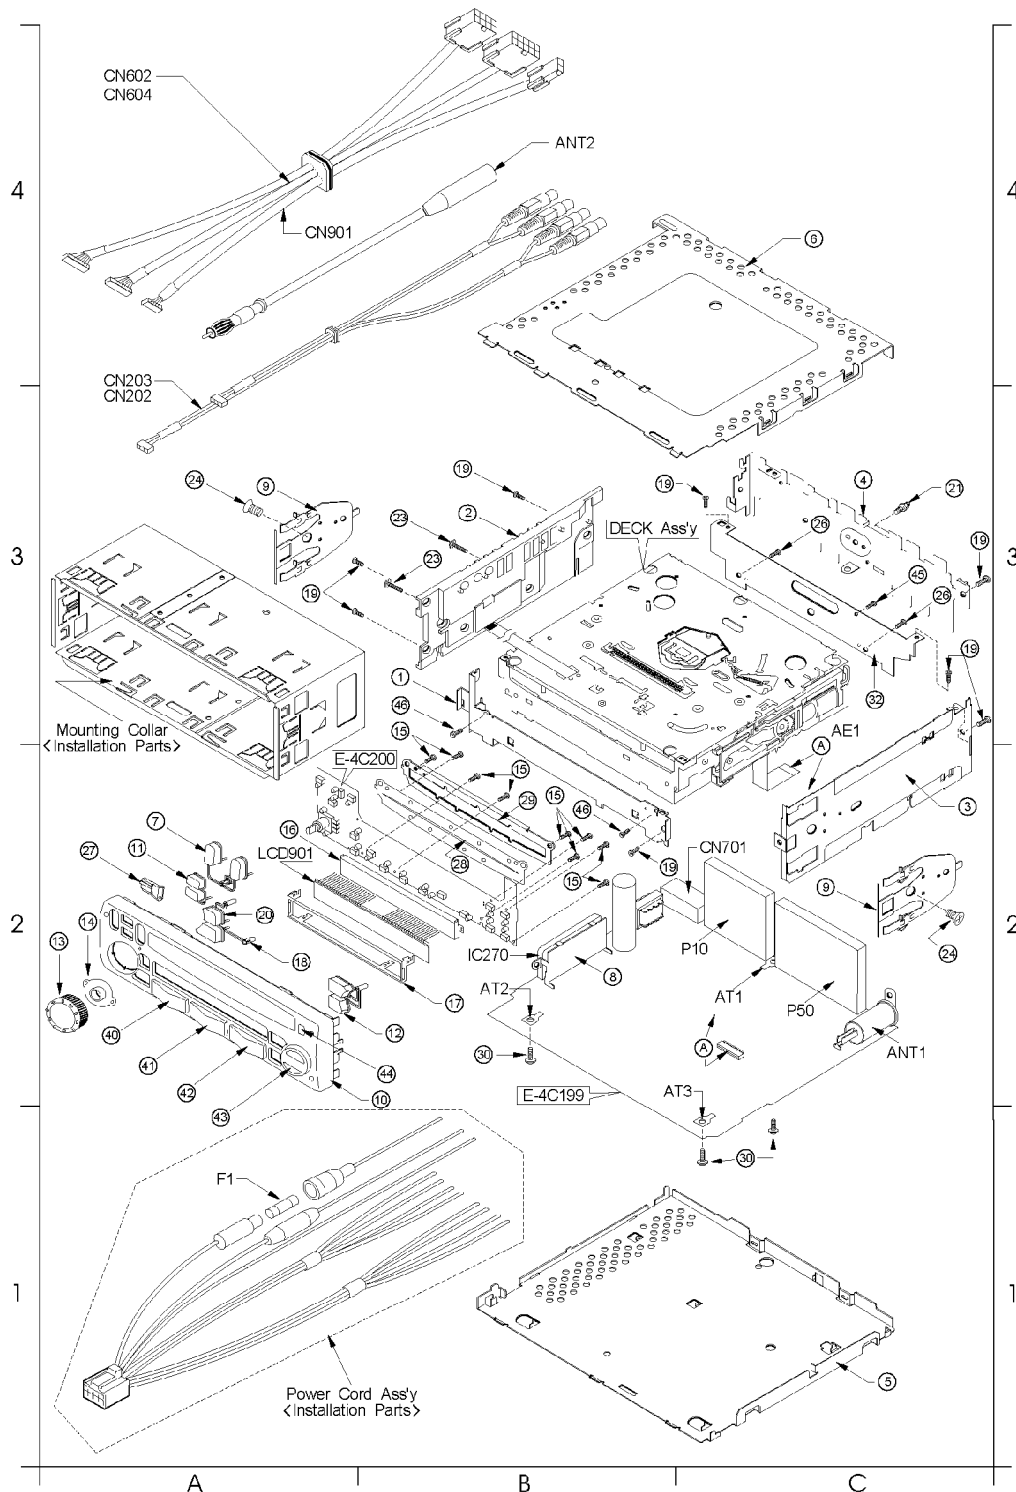

18. REPLACEMENT PARTS LIST (CD Deck)

Note:

1. Be sure to make your orders of replacement parts according to this list.
2. Important safety notice: Component, identified by  mark have special characteristics important for safety. when replacing any of these components, use only manufacturer's specified parts.
3. Location keys in the remarks column indicates the general location of the parts shown in the exploded drawing, as in a load map.
4. The marking (RTL) indicates that Retention Time is limited for this item. After the discontinuation of assembly in production, the item will continue to be availability is dependent on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.
5. "A" marks in remarks column are indicated supply parts of Audio Division(AD) in Matsushita Electric Industrial Co., Ltd.(MEI)
6. "V" marks in remarks column are indicated supply parts of Video System Division(VSD) in Matsushita Electric Industrial Co., Ltd. (MEI)

Ref. No.	Part No.	Part Name & Description	Remarks
IC's and Transistor			
IC1	AN8835SBE1	IC	V
IC2	MN662741RPA	IC	A
IC3	BA6795FPE2	IC	A
IC4	MB89193-233E	IC	A
Q1	2SA1037AKTXR	Transistor	V
Q2	DTC114TKT96	Transistor	V
Diodes			
D1	MA141WKTX	Diode	A
Capacitors			
C1	RCSX0JX226LE	Tantalum 22MFD 6.3WV	V
C3	ECEA0JKA101I	Electrolytic 100MFD 6.3WV	
C4	ECUV1E104ZFN	Chip 0.1MFD 25WV	V
C5	ECUV1E104ZFN	Chip 0.1MFD 25WV	V
C6	ECUV1E104MBN	Chip 0.1MFD 25WV	V
C7	ECUV1E104MBN	Chip 0.1MFD 25WV	V
C8	ECUV1H272KBN	Chip 0.0027MFD 50WV	V
C9	ECUV1E273KBN	Chip 0.027MFD 25WV	V
C10	ECUV1E104MBN	Chip 0.1MFD 25WV	V
C11	ECUV1E104MBN	Chip 0.1MFD 25WV	V
C12	ECUV1H222KBN	Chip 0.0022MFD 50WV	V
C13	ECUV1H182KBN	Chip 0.0018MFD 50WV	V
C14	ECUV1E104MBN	Chip 0.1MFD 25WV	V
C15	ECUV1C473KBN	Chip 0.047MFD 16WV	V
C16	ECUV1E223KBN	Chip 0.022MFD 25WV	V
C17	ECUV1E273KBN	Chip 0.027MFD 25WV	V
C18	ECUV1H471KBN	Chip 470PF 50WV	V
C19	ECUV1E104MBN	Chip 0.1MFD 25WV	V
C20	ECUV1E223KBN	Chip 0.022MFD 25WV	V
C21	ECUV1C224KBM	Chip 0.22MFD 16WV	V
C22	ECUV1C224KBM	Chip 0.22MFD 16WV	V
C23	ECUV1H070DCN	Chip 7PF 50WV	V

Ref. No.	Part No.	Part Name & Description	Remarks
C24	ECUV1H220JCN	Chip 22PF 50WV	V
C25	ECUV1E104ZFN	Chip 0.1MFD 25WV	V
C26	ECUV1H102KBN	Chip 0.001MFD 50WV	V
C27	ECUV1H102KBN	Chip 0.001MFD 50WV	V
C28	ECUV1E223ZFN	Chip 0.022MFD 25WV	V
C29	RCE0JPK221IG	Electrolytic 220MFD 6.3WV	V
C30	ECUV1E154MBM	Chip 0.15MFD 25WV	V
C33	RCE0JPK221IG	Electrolytic 220MFD 6.3WV	V
C34	ECUV1H561KBN	Chip 560PF 50WV	V
C35	RCE0JKA101I	Electrolytic 100MFD 6.3WV	
C36	ECE1AKA221I	Electrolytic 220MFD 10WV	
C37	ECUV1E104ZFN	Chip 0.1MFD 25WV	V
C38	ECEA0JKA221I	Electrolytic 220MFD 6.3WV	
C39	ECUV1E104ZFN	Chip 0.1MFD 25WV	V
C40	ECUV1H472MBN	Chip 0.0047MFD 50WV	V
C42	ECUV1E104ZFN	Chip 0.1MFD 25WV	V
C44	ECUV1H331KBN	Chip 330PF 25WV	V
C45	ECUV1E224ZFN	Chip 0.22MFD 25WV	V
C56	ECUV1H221KBN	Chip 220PF 50WV	A
Resistors			
R1	ERJ6GEYJ150	Chip 15 OHMS 1/10W	
R2	ERJ6GEYJ221	Chip 220 OHMS 1/10W	
R3	ERJ6GEYJ150	Chip 15 OHMS 1/10W	
R5	ERJ6GEYJ330	Chip 33 OHMS 1/10W	
R6	ERJ6GEYJ224	Chip 220K OHMS 1/10W	
R7	ERJ6GEYJ184	Chip 180K OHMS 1/10W	
R8	ERJ6GEYJ102	Chip 1K OHMS 1/10W	
R9	ERJ6GEYJ103	Chip 10K OHMS 1/10W	
R10	ERJ6GEYJ102	Chip 1K OHMS 1/10W	
R11	ERJ6GEYJ103	Chip 10K OHMS 1/10W	
R12	ERJ6GEYJ393	Chip 39K OHMS 1/10W	
R13	ERJ6GEYJ183	Chip 18K OHMS 1/10W	
R14	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R15	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R16	ERJ6GEYJ154	Chip 150K OHMS 1/10W	
R17	ERJ6GEYJ683	Chip 68K OHMS 1/10W	
R18	ERJ6GEYJ471	Chip 470 OHMS 1/10W	
R20	ERJ6GEYJ101	Chip 100 OHMS 1/10W	
R21	ERJ6GEYJ220	Chip 22 OHMS 1/10W	
R22	ERJ6GEYJ220	Chip 22 OHMS 1/10W	
R23	ERJ6GEYJ822	Chip 8.2K OHMS 1/10W	
R24	ERJ6GEYJ682	Chip 6.8K OHMS 1/10W	
R25	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R26	ERJ6GEYJ333	Chip 33K OHMS 1/10W	
R27	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R28	ERJ6GEYJ102	Chip 1K OHMS 1/10W	
R29	ERJ6GEYJ102	Chip 1K OHMS 1/10W	
R30	ERJ6GEYJ103	Chip 10K OHMS 1/10W	
R31	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R32	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R33	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R34	ERJ6GEYJ473	Chip 47K OHMS 1/10W	


Ref. No.	Part No.	Part Name & Description	Remarks
R35	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R36	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R37	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R39	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R40	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R41	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R42	ERJ6GEYJ102	Chip 1K OHMS 1/10W	
R43	ERJ6GEYJ102	Chip 1K OHMS 1/10W	
R44	ERJ6GEYJ102	Chip 1K OHMS 1/10W	
R45	ERJ6GEYJ102	Chip 1K OHMS 1/10W	
R46	ERJ6GEYJ102	Chip 1K OHMS 1/10W	
R47	ERJ6GEYJ121	Chip 120 OHMS 1/10W	
R49	ERJ6GEYJ155V	Chip 1.5M OHMS 1/10W	
R50	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R51	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R52	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R53	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R54	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R55	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R56	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R57	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R58	ERJ6GEYJ473	Chip 47K OHMS 1/10W	
R62	ERJ6GEYJ272	Chip 2.7K OHMS 1/10W	
R63	ERJ6GEYJ102	Chip 1K OHMS 1/10W	
RJ1	ERJ8GEY0R00V	Chip 0 OHMS 1/8W	
RJ2	ERJ8GEY0R00V	Chip 0 OHMS 1/8W	
RJ3	ERJ8GEY0R00V	Chip 0 OHMS 1/8W	
RJ4	ERJ8GEY0R00V	Chip 0 OHMS 1/8W	
RJ5	ERJ6GEYJ1R8V	Chip 0 1.8HMS 1/10W	V
RJ6	ERJ8GEY0R00V	Chip 0 OHMS 1/8W	
RJ7	ERJ8GEY0R00V	Chip 0 OHMS 1/8W	
Oscillators			
X1	RVBCST4R00MT	Ceramic Oscillator	V
X2	RSXC16M9S01T	Crystal Oscillator	v
Connector			
CN1	RJS2A1816T	Connector 16P	v
CN2	RJS1A7114T	Connector 14P	v
CN3	RJS1A7105T	Connector 5P	v
CN4	RJP2G17ZA	Connector 2P	v
CN5	RJS2A1405T	Connector 5P	v
Switchs			
SW1	ESE11SH2	Switch	v
SW2	RSP1A015-A	Switch	v
SW3	RSP1A015-A	Switch	v
SW4	RSP1A015-A	Switch	v
SW5	RSP1A015-A	Switch	v

Ref. No.	Part No.	Part Name & Description	Remarks
Miscellaneous			
101	RDG0350	Gear	v(1-B)
102	RDG0351	Gear N2	v(1-C)
103	RDG0352-1	Loading Gear	v(1-C)
104	RDG0353	Roller Drive Gear	v(1-C)
105	RDG0354	GOLLER Drive Arm	v(1-C)
106	REM0060	Loading motor	v(1-B)
106-1	REE0669	Lead Wire	V(2-A)
			(1-B)
107	RMB0465	Spring	V(2-A)
			(2-B)
108	RMB0466	Spring	V(2-A)
109	RMC0292	Main Slider Spring	V(1-C)
110	RMG0408-K	Insullator	V(2-A)
			(2-B)
111	RMK0309-2	Mechanism Frame	V(2-B)
112	RML0432	Lock Arm	V(2-B)
113	RML0433-1	Drive Arm	V(2-C)
114	RMR0952-W	Main Slider	V(1-C)
115	RMR0953-W	Lift Slider	V(2-C)
116	RMR0954-W	Lock Slider	V(2-B)
117	XYN2+C5	Screw 2mm * 5mm	V(1-B)
118	RHW31005	Washer	V(1-A)
119	RMG0382-H	Rubber Roller	V(1-A)
120	RML0434	Roller Arm	V(1-A)
121	RMR0769-W	Roller Bering	V(1-A)
122	RXJ0017	Roller Shaft	V(1-B)
123	REE0668	Flexible PCB	V(4-B)
124	RHW27004	Washer	V(3-C)
125	RMB0461	Spring	V(4-C)
126	RMB0468	Spring	V(4-C)
127	RMB0489	Spring	V(4-C)
			V(3-C)
128	RML0428	Switch LEVER	V(3-C)
129	RML0430	Trigger Leaver L	V(3-C)
130	RML0431	Trigger Leaver R	V(3-C)
131	RML0435	Lock Leaver	V(4-C)
132	RMM0155	Slider A	V(3-C)
			V(-)
133	RMM0156	Slider B	V(3-C)
134	RMQ0597	Screw	V(2-C)
135	RMR0951-W	Disc Guide	V(2-C)
136	RKX0201	Upper Chassis	V(4-C)
137	RXL0134	CD Detect Leavr L	V(3-B)
138	RXL0135	CD Detect Leavr R	V(3-C)
139	RXL0136	Control Arm	V(3-C)
140	RMB0462	Spring	V(3-B)
141	RMC0295	Drive Shaft Rotainer	V(3-B)
142	RMC0293	Clamp Rotainer	V(4-B)
143	RML0429	Clamp Arm	V(4-B)
144	RMQ0467	Screw	V(4-B)
145	RMR0956-W	Clamper	(4-B)
146	RMB0345-2	Spring	V(4-A)
147	RMB0445	Spring	V(1-B)


Ref. No.	Part No.	Part Name & Description	Remarks
148	RMB0467	Spring	V(2-B)
149	RXK0199	Traverse Chassis	V(4-A)
<u>150</u>	RFKPAJ2751K	Spindle Motor	V(3-A)
<u>151</u>	RAF0140A	Opical Pickup	V(3-B)
152	RMC0294	Opical Pickup Retainer	V(3-A)
153	RXJ0018	Drive Shaft	V(3-A)
154	RXQ0474	Boad Nut	V(3-B)
155	XQN17+BG45	Screw	V(3-B)
<u>156</u>	REM0061	Traverse Motor	V(3-B)
157	XTW2+6S	Screw 2mm * 6mm	V(3-B)
158	XQN2+CJ8	Screw 2mm * 8mm	V(4-C)
159	XTW2+6S	Screw 2mm * 6mm	V(2-A)
160	RMB0463	Spring	V(2-A)
161	RMB0464	Spring	V(1-B)
162	RXQ0476	Holder	V(3-B)
162-1	RMA0921	Terminal Board	V(3-B)
<u>163</u>	RDP0084	Pulley	V(3-B)
<u>164</u>	RDV0030	Belt	V(2-B)
165	RMQ0461	Screw	V(4-A)

19. EXPLODED VIEW (CD DECK)

■ Numbers in ○ are indicated REF. No. in the REPLACEMENT PARTS LIST

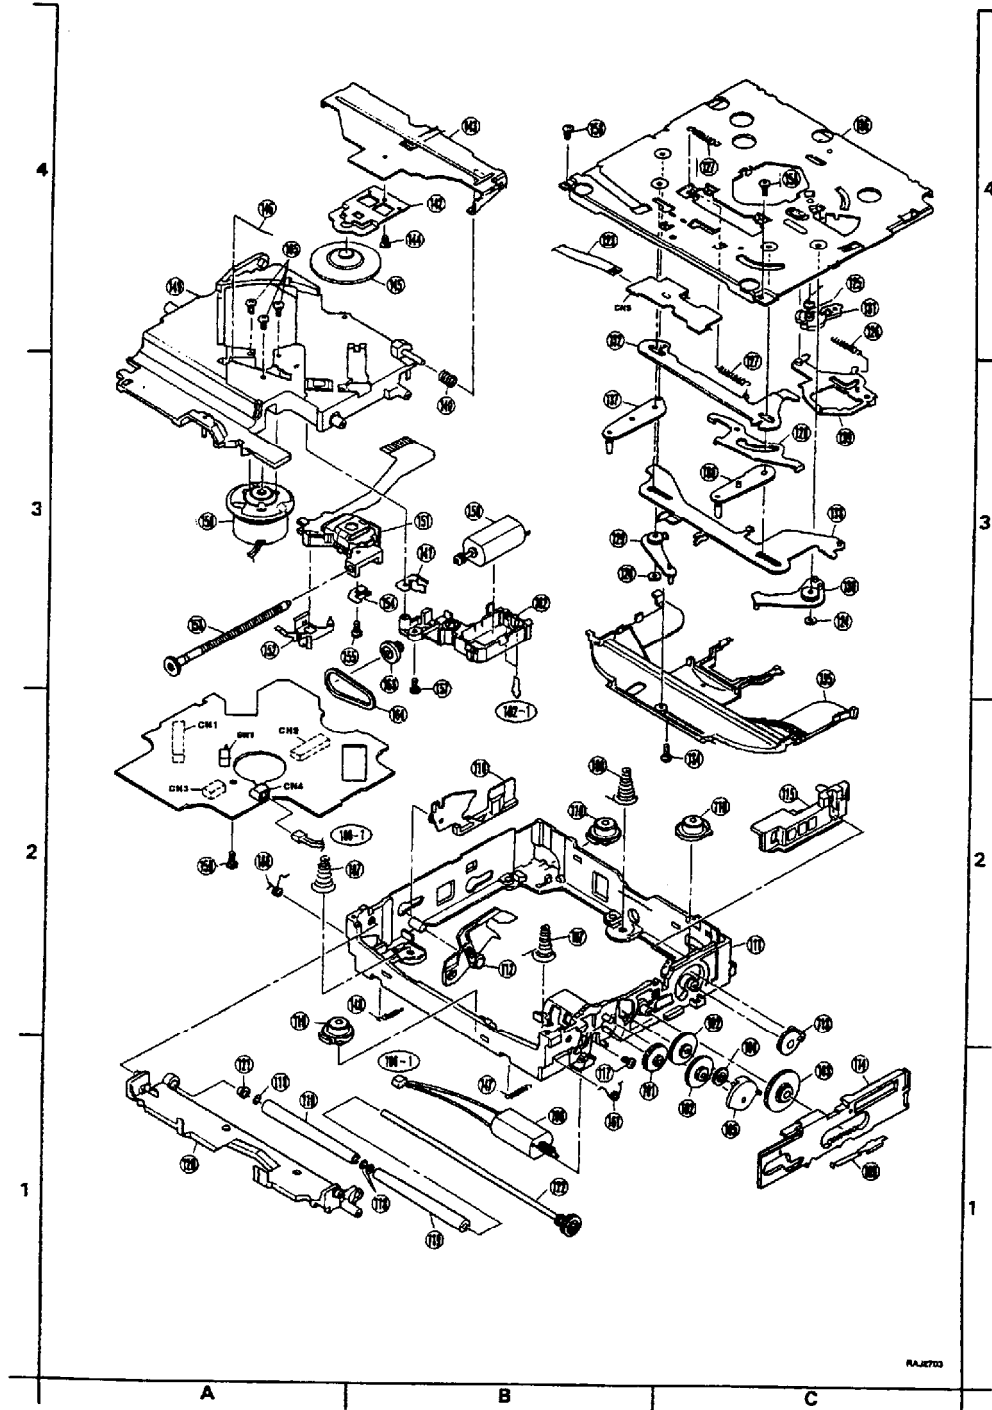


20. PACKING PARTS LIST

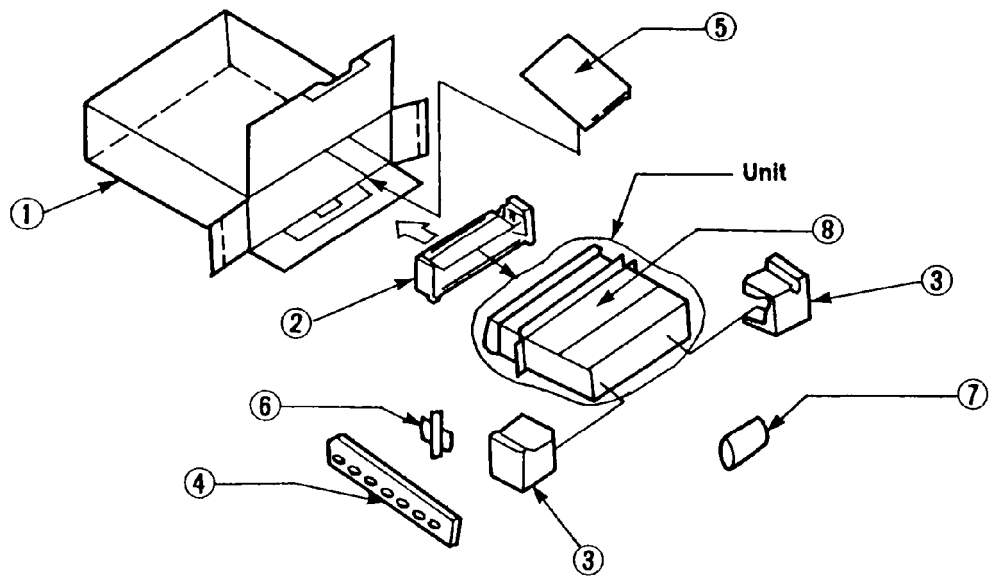


· Item numbers listed below should not order regular spare parts. (not available)

Item No.	Parts No.	Parts Name & Description	Q'ty	Remarks
<u>1</u>	-	Inner Carton	1	Not Available
<u>2</u>	-	Packing Pad, Front	1	Not Available
<u>3</u>	-	Packing Pad, Right and Left	1	Not Available
<u>4</u>	YEFG044C002	Rear Support Strap	1	
<u>5</u>				
	YFM284C332ZA	Operating Instructions	1	
<u>6</u>	FP-164	Screw Kit and Dismounting Pin	1	
<u>7</u>	YAJ024C083ZA	Power Connector Ass'y	1	
<u>8</u>	FX0214C079YA	Mounting Collar	1	


Printed in Taiwan / 2000.10

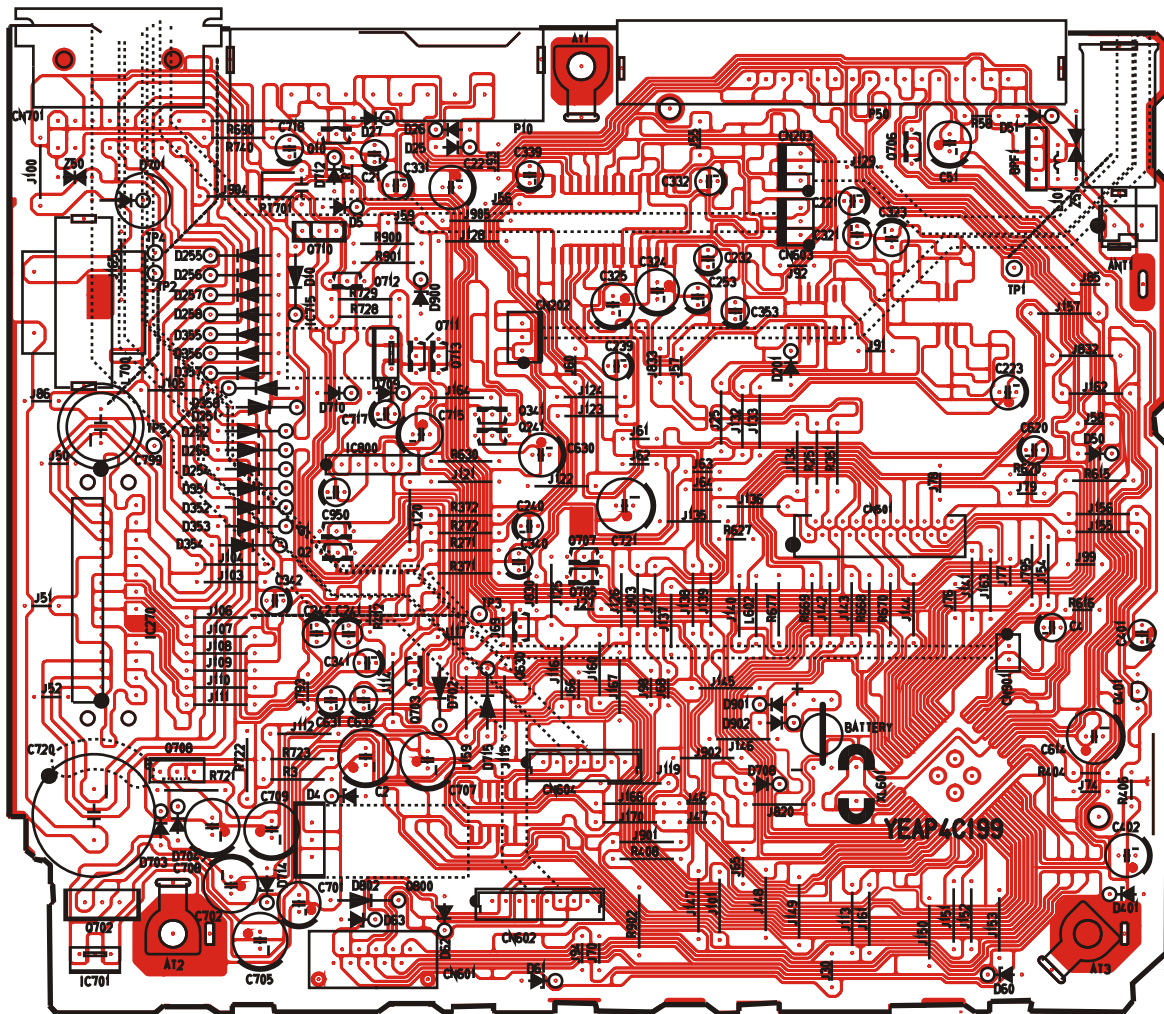



[E-4C199] [Top View]

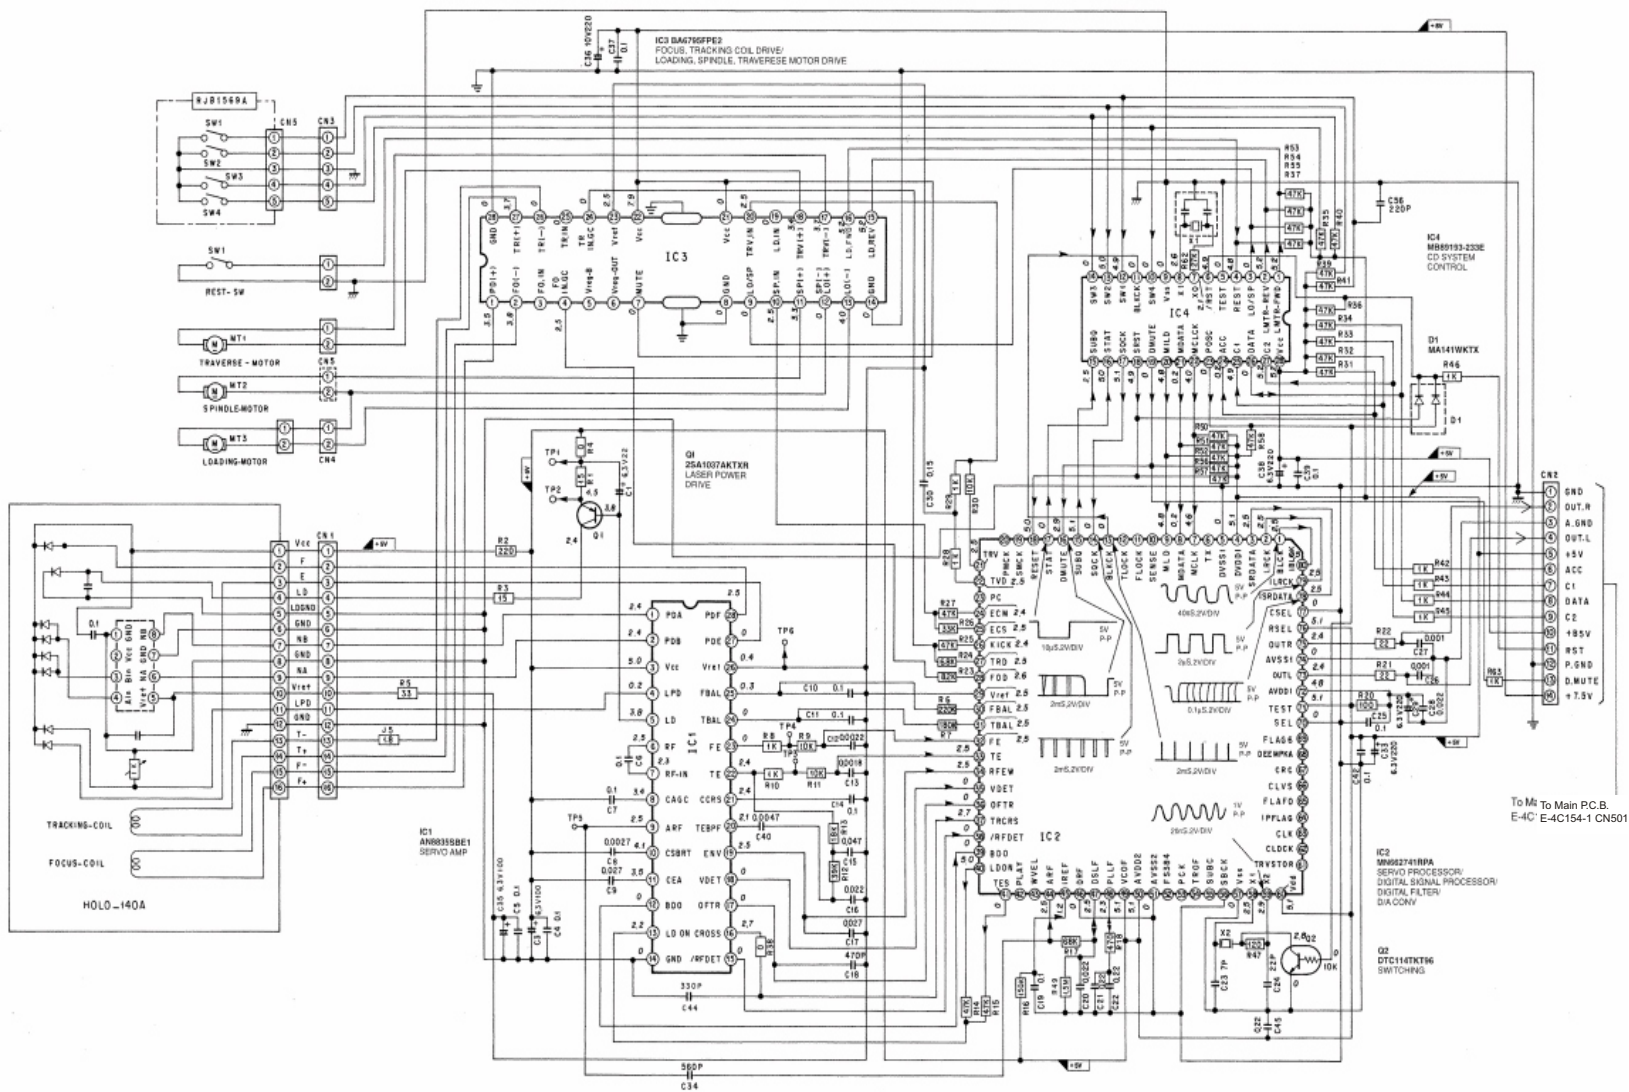


E-4C200

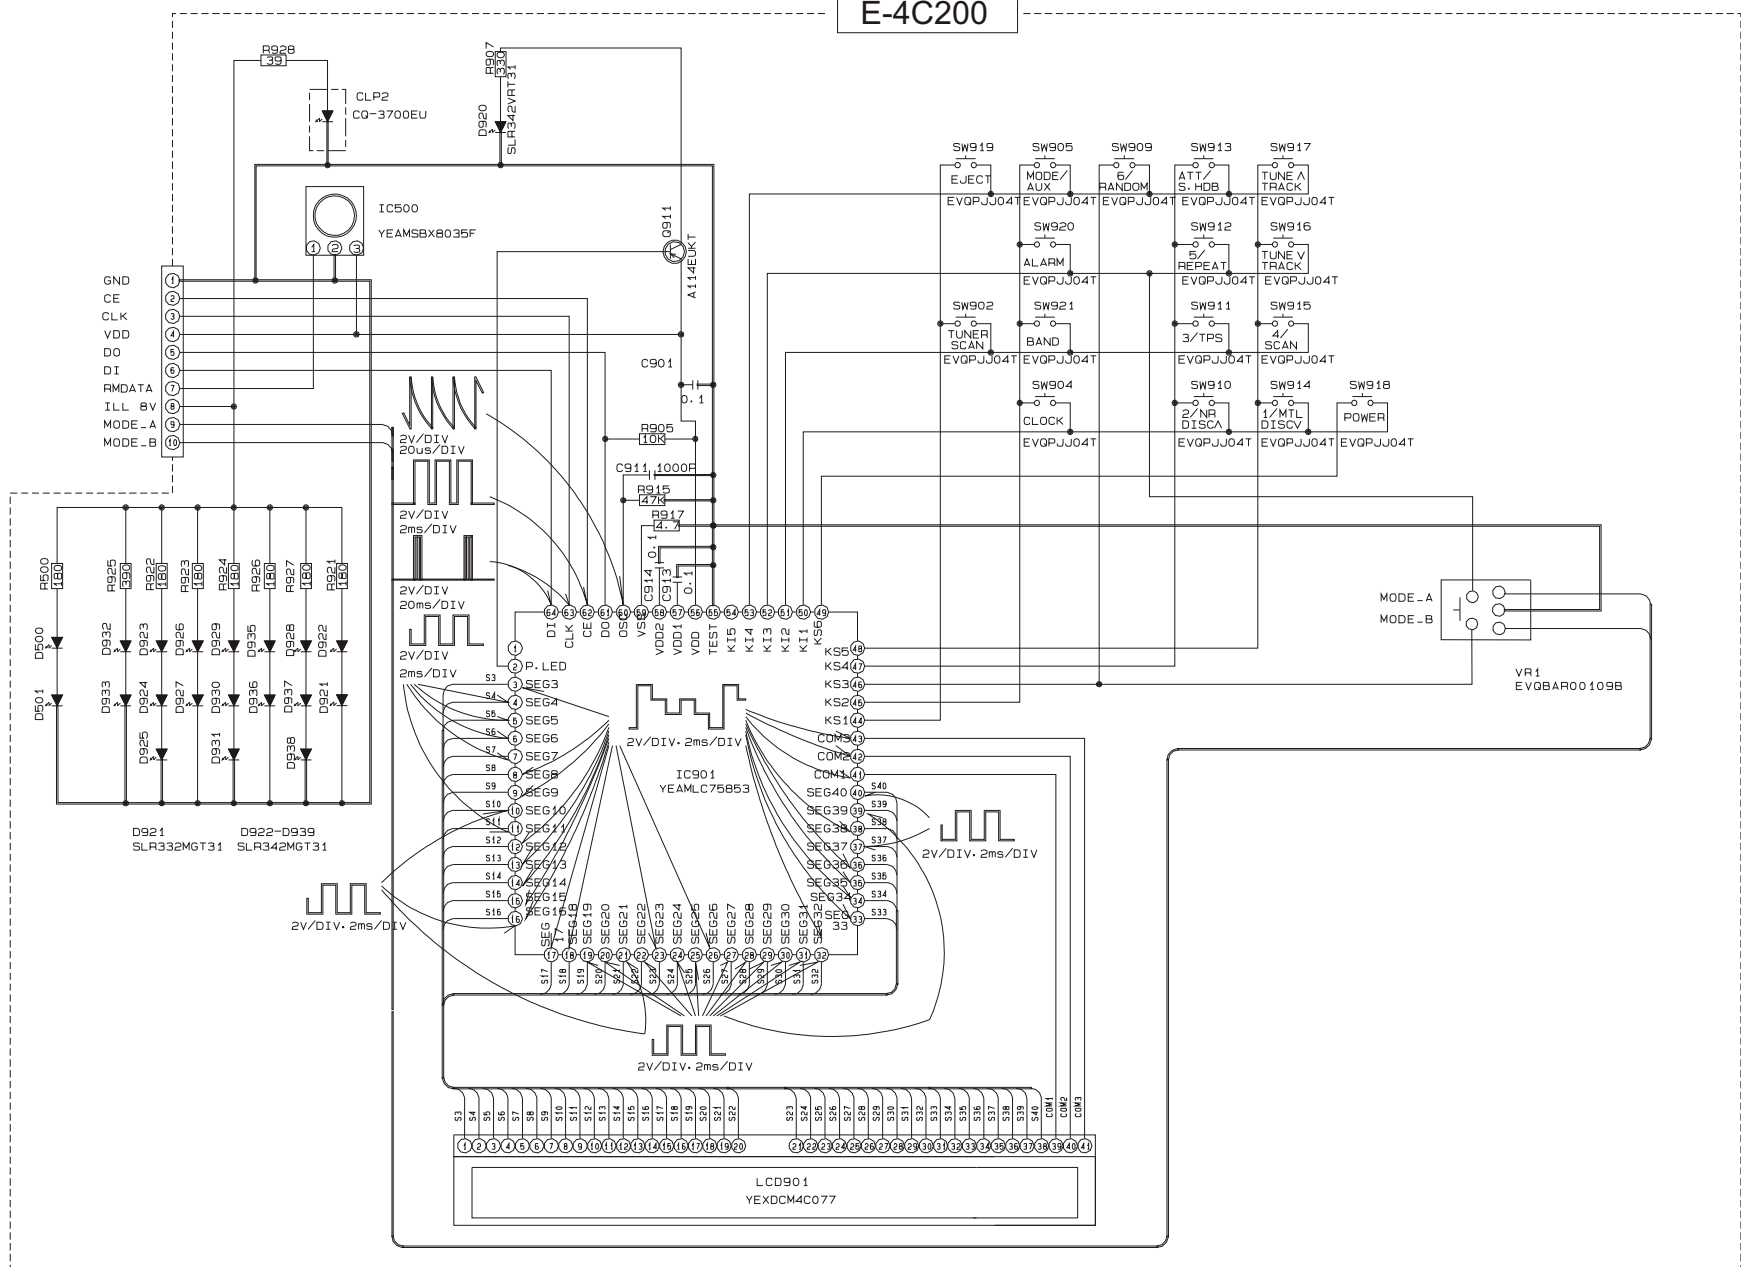


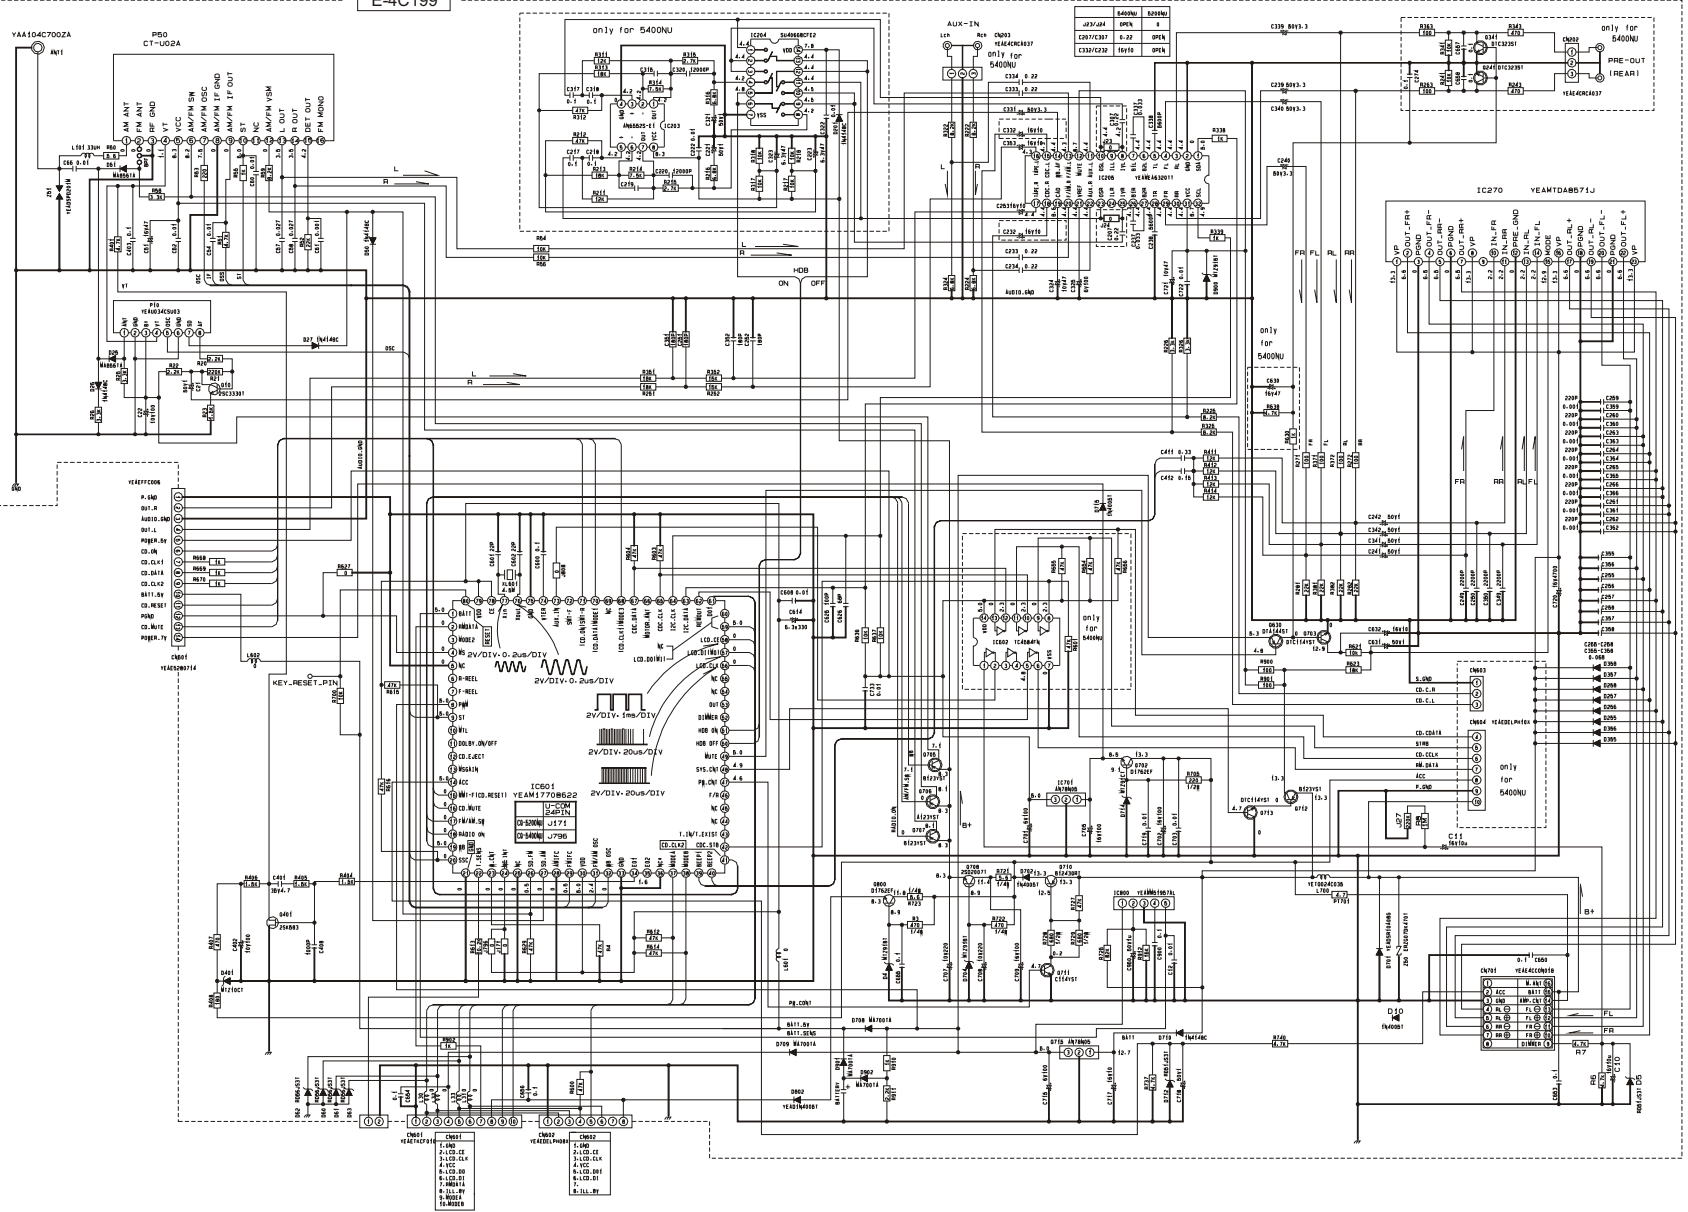

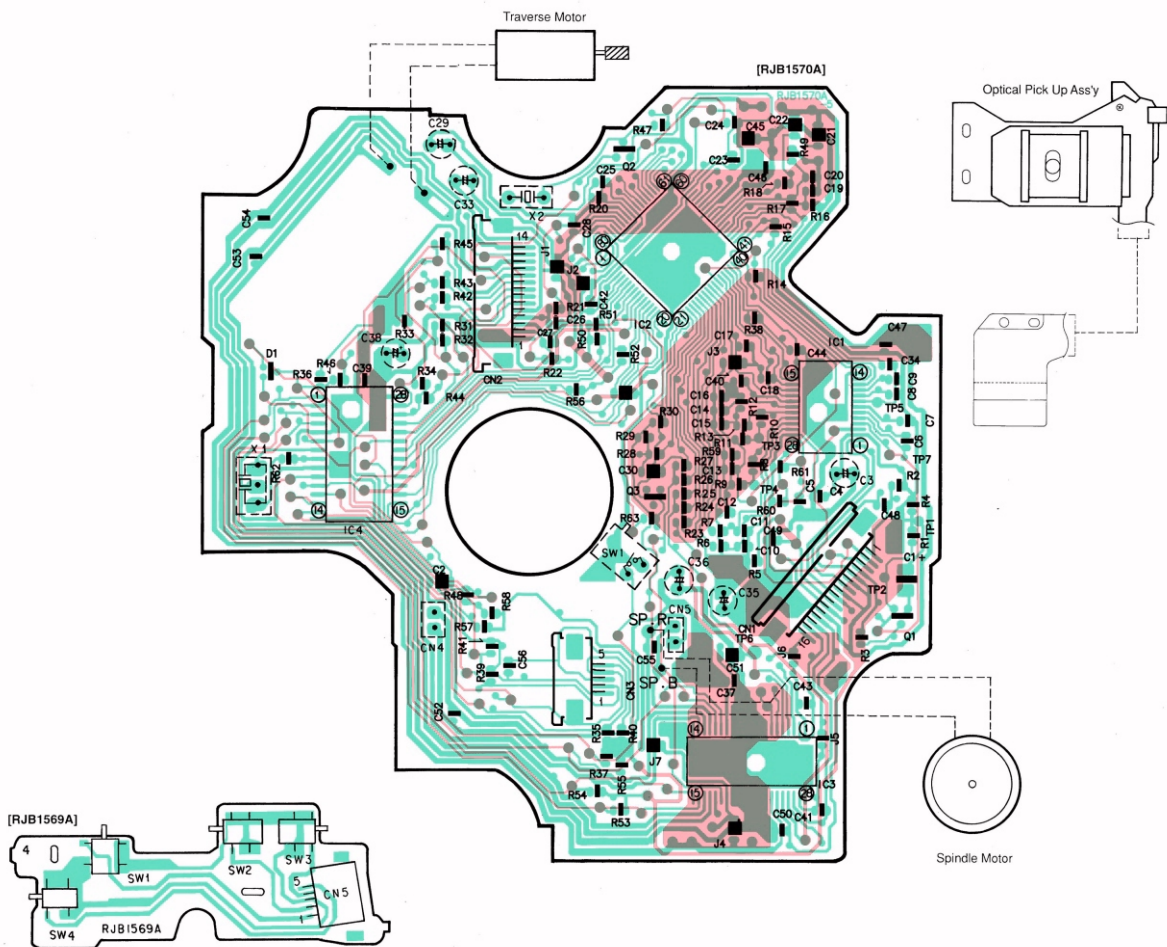

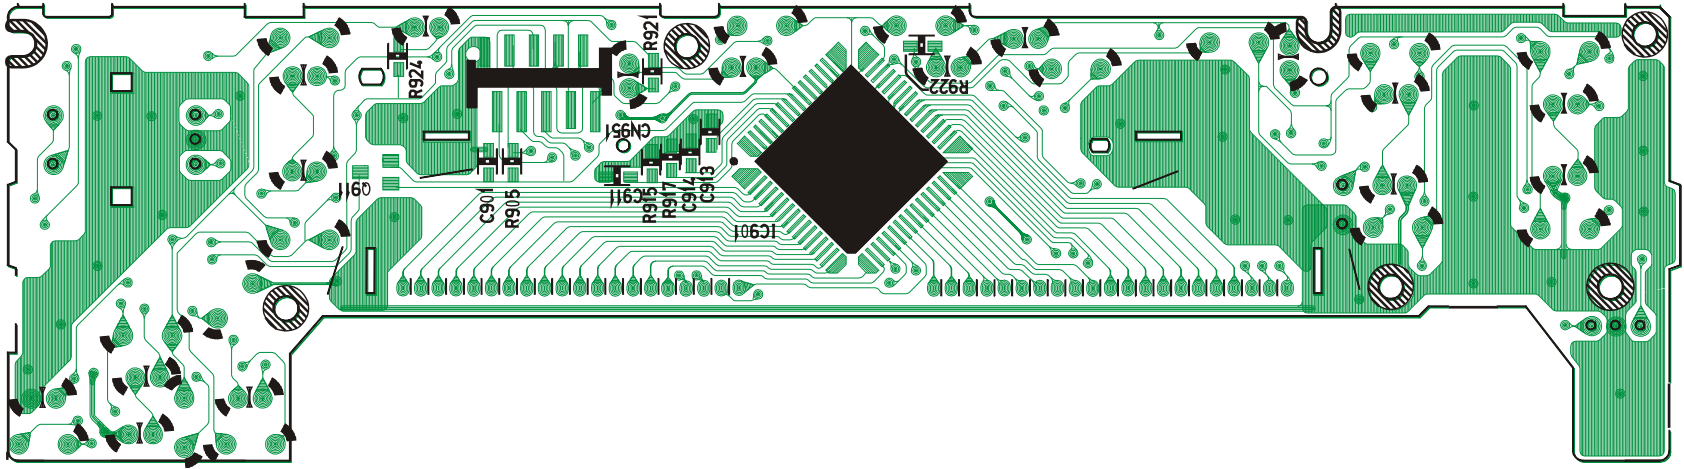

[E-4C200] [BOTTOM VIEW]

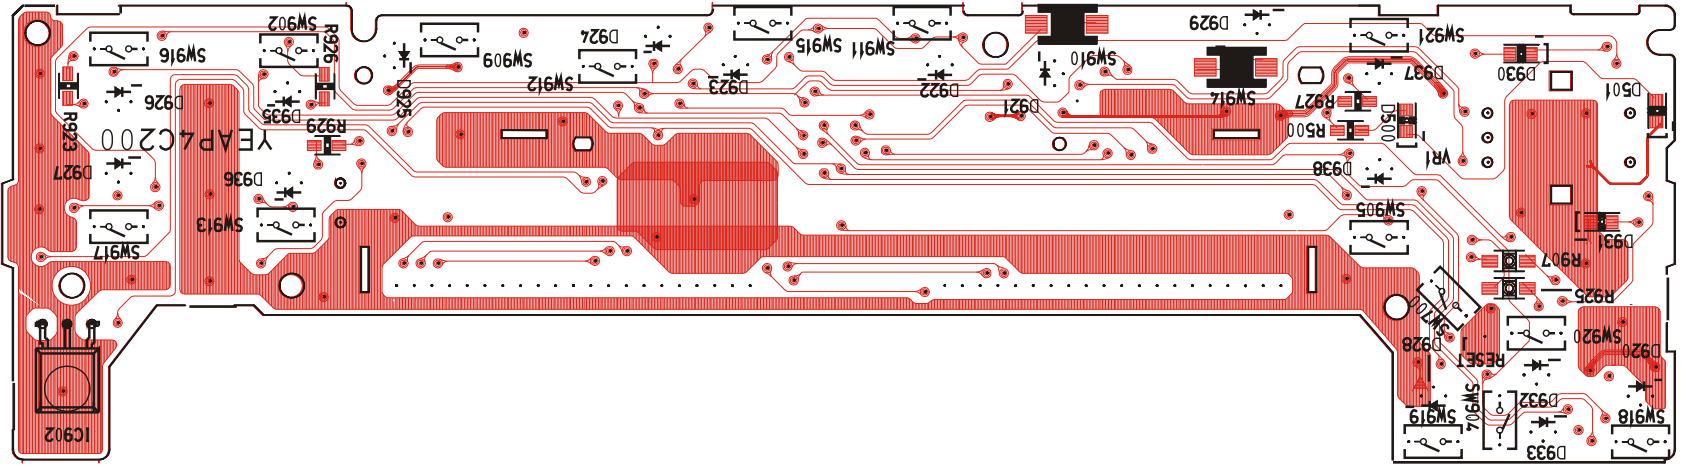

[E-4C200] [TOP VIEW]

ORDER NO.ACED030778S1

C1/C4

Service Manual

AUTOMOTIVE AFTERMARKET



**CQ-5500U / CQ-5400U / CQ-5300U / CQ-5200U / CQ-4500U /
CQ-4400U / CQ-4300U / CR-W400U**

**Heavy Duty CD Player/ Weather Band Receiver with Changer Control
Correction of Replacement Parts List**

**Please file and use this manual together with the service manual for
the above models.**

© 2003 Matsushita Electric Industrial Co., Ltd. All rights reserved.

Unauthorized copying and distribution is a violation of law.

WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Panasonic®

1. REPLACEMENT PARTS LIST

1.1. CQ-5500U, CQ-5400U, CQ-5300U, CQ-5200U

**- Correction of TAMACO supplying parts, that is "T" marks in
remarks column.**

Ref No.	Parts No.	Part Name & Description	Remarks			
			CQ-5500U	CQ-5400U	CQ-5300U	CQ-4500U
IC203	AN6552S-E1	IC	T (Added)	T (Added)	—	
IC270	YEAMTDA8571J	IC	T (Added)	T (Added)	T (Added)	T (Added)
IC602	YEAMTC4584FN	IC	T	T (Added)	T	
P10	YEAU034CSU03	WB Tuner Pack	T	T	T	T (Added)
D401	YEADMTZ10CT	Diode	T	T	T	T
D708	MA700TA	Diode	T (Added)	T (Added)	T (Added)	T (Added)
D709	MA700TA	Diode	T (Added)	T (Added)	T (Added)	T (Added)
D901	MA700TA	Diode	T (Added)	T (Added)	T (Added)	T (Added)
D902	MA700TA	Diode	T (Added)	T (Added)	T (Added)	T (Added)
C401	ECEA1VSN4R7I	Electrolytic 4.7MFD 35WV	T (Added)	T (Added)	T (Added)	T (Added)
C720	ECEA1VU472YC	Electrolytic 4700MFD 35WV	T (Added)	T (Added)	T (Added)	T (Added)
C799	ECA1CU222C	Electrolytic 2200MFD 35WV	T (Added)	T (Added)	T (Added)	T (Added)
LCD901	YEXDCM4C077	LCD	T (Added)	—	T (Added)	
LCD901	YEXDCM4C082	LCD	—	T (Added)	—	T
19	XTB3+6FFXS	Screw	T (Added)	T	T (Added)	T

1.2. CQ-4500U, CQ-4400U, CQ-4300U, CR-W400U

- Correction of TAMACO supplying parts, that is “T” marks in remarks column.

Ref No.	Parts No.	Part Name & Description	Remarks			
			CQ-4500U	CQ-4400U	CQ-4300U	CF
IC203	AN6552S-E1	IC	T	—	—	
IC270	YEAMTDA8571J	IC	T	T (Added)	T (Added)	T (/
IC602	YEAMTC4584FN	IC	T	T	T	
P10	YEAU034CSU03	WB Tuner Pack	T	T (Added)	T (Added)	T (/
D401	YEADMTZ10CT	Diode	T	T	T	T (/
D708	MA700TA	Diode	T	T (Added)	T (Added)	T (/
D709	MA700TA	Diode	—	T (Added)	—	T (/
D901	MA700TA	Diode	T	T (Added)	T (Added)	T (/
D902	MA700TA	Diode	T	T (Added)	T (Added)	T (/
C401	ECEA1VSN4R7I	Electrolytic 4.7MFD 35WV	T (Added)	T (Added)	T (Added)	T (/
C720	ECEA1VU472YC	Electrolytic 4700MFD 35WV	T (Added)	T (Added)	T (Added)	T (/
C799	ECA1CU222C	Electrolytic 2200MFD 35WV	T (Added)	T (Added)	T (Added)	T (/
LCD901	YEXDCM4C077	LCD	T	—	T (Added)	
LCD901	YEXDCM4C082	LCD	—	T (Added)	—	T (/
Z51	YEADSPD201M	Surge Protector	T (Added)	T (Added)	T (Added)	T (/
TP1	YEAT034C011	Terminal	T (Added)	T	—	
TP2	YEAT034C011	Terminal	T (Added)	T	—	
TP3	YEAT034C011	Terminal	T (Added)	T	T	
TP4	YEAT034C011	Terminal	T (Added)	T	T	
TP5	YEAT034C011	Terminal	T (Added)	T	T	
TP201	YEAT034C010	Terminal	T (Added)	T	—	
TP301	YEAT034C010	Terminal	T (Added)	T	—	
19	XTB3+6FFXS	Screw	T (Added)	T	T (Added)	T

1.3. CQ-4500U, CQ-4400U, CQ-4300U (for Tape Block)

- Correction of Part No. for Tape Block Capacitors.

Ref No.	Parts No.		Part Name & Description	Remark
	Original	Correction		
C5	ECEA1AKS330IV	ECEA1AKS330I	Electrolytic 33MFD 10WV	
C6	ECEA1CKS470IV	ECEA1CKS470I	Electrolytic 47MFD 16WV	
C7	ECEA1CKS470IV	ECEA1CKS470I	Electrolytic 47MFD 16WV	
C8	ECEA1HKS2R2IV	ECEA1HKS2R2I	Electrolytic 2.2MFD 50WV	
C9	ECEA1HKS2R2IV	ECEA1HKS2R2I	Electrolytic 2.2MFD 50WV	
C17	ECEA1CKS100IV	ECEA1CKS100I	Electrolytic 10MFD 16WV	
C18	ECEA1CKS100IV	ECEA1CKS100I	Electrolytic 10MFD 16WV	

Printed in Japan / 2003.7 (K) / (Recycled Paper)

Order No. ACED010708P7

Parts Change Notice

**CQ-4300U / CQ-4400U / CQ-4500U / CQ-5200U / CQ-5300U /
CQ-5400U / CQ-5500U / CR-W400U / CQ-RG131U / CQ-R221U**

Please revise the original parts list in the Service Manual to conform to the change(s) shown herein. / If new part numbers are shown, be sure to use then ordering parts.

Reason for Change

*The circled item indicates the reason. If no marking, see the Notes in the bottom column.

	1. Improve performance	Change of supply factory from MEI to TAMACO.
	2. Change of material or dimension	
	3. To meet approved specification	
	4. Standardization	
	5. Addition	
	6. Deletion	
	7. Correction	
●	8. Other	

Interchangeability Code

**The circled item indicates the interchangeability. If no marking, see the Notes in the bottom column.

Parts	Set Production	
A Original / New	 Early / Late	Original or new parts may be used in early or late production sets until exhausted, then stock new parts.
B Original / New	 Early / Late	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts when possible, then stock new parts.
C Original / New	 Early / Late	New parts only may be used in early or late production sets. / Stock new parts.
D Original / New	 Early / Late	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
● E	Other	

Part Number					
Model No.	Ref. No.	Original Part No.	New Part No.	Notes	Part Name & Descriptions
CQ-4300U CQ- 4400U CQ- 4500U CQ- 5200U CQ- 5300U CQ- 5400U CQ- 5500U CR- W400U CQ- RG131U CQ- R221U	IC270	YEAMTDA8571J	-	8-E	IC

File this Parts Change Notice with your copy of the Service Manual.

© 2001 Matsushita Communication Industrial Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

Panasonic®

Printed in Japan (K) 2001.7 (Recycled Paper)